

11/28/00  
JC945 U.S. PTO

11-30-00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (11-00)  
Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	642-001
First Inventor	Alexandre N. Terentiev
Title	PUMPING OR MIXING SYSTEM USING A LEVITATING MAGNETIC BEARING RELATED SYSTEM COMPONENTS, AND RELATED METHODS
Express Mail Label No.	EL668226919US

JC639 U.S. PTO  
09/24815  
11/28/00

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
- ☒ Applicant claims small entity status.  
See 37 CFR 1.27.
- ☒ Specification [Total Pages 105]  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross Reference to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to sequence listing, a table, or a computer program listing appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 17]
- ☒ Oath or Declaration [Total Pages ]
  - ☒ Newly executed (original or copy)
  - ☐ Copy from a prior application (37 CFR 1.63 (d))  
(for continuation/divisional with Box 18 completed)
    - ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
- ☐ Application Data Sheet. See 37 CFR 1.76

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - ☐ Computer Readable Form (CRF)
  - Specification Sequence Listing on:
    - ☐ CD-ROM or CD-R (2 copies); or
    - ☐ paper
  - ☐ Statements verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

- ☐ Assignment Papers (cover sheet & document(s))
- ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
- ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
- ☐ Request and Certification under 35 U.S.C. 122 (b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent.
- ☐ Other: \_\_\_\_\_

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_  
Prior application information. Examiner \_\_\_\_\_ Group Art Unit. \_\_\_\_\_

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 19. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 001009 (Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

Name					
Address					
City	State	Zip Code			
Country	Telephone	859-252-0889	Fax	859-252-0779	

Name (Print/Type)	Andrew D. Dorisio	Registration No. (Attorney/Agent)	41,713
Signature		Date	11/28/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

# FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.  
Small Entity payments must be supported by a small entity statement,  
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.  
See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$ 2,011

## Complete if Known

Application Number  
Filing Date November 28, 2000  
First Named Inventor Alexandre N. Terentiev  
Examiner Name  
Group / Art Unit  
Attorney Docket No. 642-001

## METHOD OF PAYMENT (check one)

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to.

Deposit Account Number 11-0978  
Deposit Account Name

2. ☒ Payment Enclosed:  
☒ Check ☐ Money Order ☐ Other

3. ☒ Charge any additional fee required under 37 CFR Sections 1.16 and 1.17 or credit any overpayment to the above-listed deposit account.

## FEE CALCULATION

### 1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 710	201 355	Utility filing fee	355
106 320	206 160	Design filing fee	
107 490	207 245	Plant filing fee	
108 710	208 355	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$ 355

### 2. EXTRA CLAIM FEES

Total Claims 124 - 20\*\* = 104 X 9 = 936  
Independent Claims 21 - 3\*\* = 18 X 40 = 720  
Multiple Dependent =

\*\*or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 80	202 40	Independent claims in excess of 3
104 270	204 135	Multiple dependent claim, if not paid
109 80	209 40	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$ 1,656

## FEE CALCULATION (continued)

### 3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 390	216 195	Extension for reply within second month	
117 890	217 445	Extension for reply within third month	
118 1,390	218 695	Extension for reply within fourth month	
128 1,890	228 945	Extension for reply within fifth month	
119 310	219 155	Notice of Appeal	
120 310	220 155	Filing a brief in support of an appeal	
121 270	221 135	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,240	241 620	Petition to revive - unintentional	
142 1,240	242 620	Utility issue fee (or reissue)	
143 440	243 220	Design issue fee	
144 600	244 300	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	
146 710	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 710	249 355	For each additional invention to be examined (37 CFR § 1.129(b))	

Other fee (specify) \_\_\_\_\_

Other fee (specify) \_\_\_\_\_

\* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$ 0

## SUBMITTED BY

Name (Print/Type) ANDREW D. DORISIO  
Signature

Registration No. 41,713  
(Attorney/Agent)

## Complete (if applicable)

Telephone 859/ 252-0889

Date 11/28/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

**PUMPING OR MIXING SYSTEM USING A  
LEVITATING MAGNETIC BEARING  
RELATED SYSTEM COMPONENTS,  
AND RELATED METHODS**

This application claims the benefit of the filing date of: (1) U.S. Patent Application Ser. No. 09/460,600, filed December 14, 1999; and (2) U.S. Provisional Patent Application Ser. No. 60/239,187, filed October 9, 2000.

**Technical Field**

The present invention relates generally to the mixing or pumping of fluids or the like and, more particularly, to a number of systems, related components, and related methods for pumping or mixing fluids using  
5 a rotating magnetic bearing levitated by a superconducting element.

**Background of the Invention**

Most pharmaceutical solutions and suspensions manufactured on an industrial scale require highly controlled, thorough mixing to achieve  
10 a satisfactory yield and to ensure a uniform distribution of ingredients in the final product. Agitator tanks are frequently used to complete the mixing process, but a better degree of mixing is normally achieved by using a mechanical stirrer or impeller (e.g., a set of mixing blades attached to a metal

rod). Typically, the mechanical stirrer or impeller is simply lowered into the fluid through an opening in the top of the vessel and rotated by an external motor to create the desired mixing action.

One significant limitation or shortcoming of such an arrangement is the danger of contamination or leakage during mixing. The rod carrying the mixing blades or impeller is typically introduced into the vessel through a dynamic seal or bearing. This opening provides an opportunity for bacteria or other contaminants to enter, which of course can lead to the degradation of the product. A corresponding danger of environmental contamination exists in applications involving hazardous or toxic fluids, or suspensions of pathogenic organisms, since dynamic seals or bearings are prone to leakage. Cleanup and sterilization are also made difficult by the dynamic bearings or seals, since these structures typically include folds and crevices that are difficult to reach. Since these problems are faced by all manufacturers of sterile solutions, pharmaceuticals, or the like, the U.S. Food and Drug Administration (FDA) has consequently promulgated strict processing requirements for such fluids, and especially those slated for intravenous use.

Recently, there has also been an extraordinary increase in the use of biosynthetic pathways in the production of pharmaceutical materials, but problems plague those involved in this rapidly advancing industry. The primary problem is that suspensions of genetically altered bacterial cells frequently used to produce protein pharmaceuticals (insulin is a well-known



example) require gentle mixing to circulate nutrients. If overly vigorous mixing or contact between the impeller and the vessel wall occurs, the resultant forces and shear stresses may damage or destroy a significant fraction of the cells, as well as protein molecules that are sensitive to shear stresses. This not only reduces the beneficial yield of the process, but also creates deleterious debris in the fluid suspension that requires further processing to remove.

In an effort to overcome this problem, others have proposed alternative mixing technologies. The most common proposal for stirring fluids under sterile conditions is to use a rotating, permanent magnet bar covered by an inert layer of TEFLON, glass, or the like. The magnetic bar is placed on the bottom of the agitator vessel and rotated by a driving magnet positioned external to the vessel. Of course, the use of such an externally driven magnetic bar avoids the need for a dynamic bearing, seal or other opening in the vessel to transfer the rotational force from the driving magnet to the stirring magnet. Therefore, a completely enclosed system is provided. This of course prevents leakage and the potential for contamination created by hazardous materials (e.g., cytotoxic agents, solvents with low flash points, blood products, etc.), eases clean up, and allows for the desirable sterile interior environment to be maintained.

However, several well-recognized drawbacks are associated with this mixing technology, making it unacceptable for use in many applications. For example, the driving magnet produces not only torque on

the stirring magnetic bar, but also an attractive axial thrust force tending to drive the bar into contact with the bottom wall of the vessel. This of course generates substantial friction at the interface between the bar and the bottom wall of the vessel. This uncontrolled friction generates unwanted heat and may also introduce an undesirable shear stress in the fluid. Consequently, fragile biological molecules, such as proteins and living cells that are highly sensitive to temperature and shear stress, are easily damaged during the mixing process, and the resultant debris may contaminate the product. Moreover, the magnetic bar stirrer may not generate the level of circulation provided by an impeller, and thus cannot be scaled up to provide effective mixing throughout the entire volume of large agitation tanks of the type preferred in commercial production operations.

In yet another effort to eliminate the need for dynamic bearings or shaft seals, some have proposed mixing vessels having external magnets that remotely couple the mixing impeller to a motor located externally to the vessel. A typical magnetic coupler comprises a drive magnet attached to the motor and a stirring magnet carrying an impeller. Similar to the magnetic bar technology described above, the driver and stirrer magnets are kept in close proximity to ensure that the coupling between the two is strong enough to provide sufficient torque. An example of one such proposal is found in U.S. Patent No. 5,470,152 to Rains.

As described above, the high torque generated can drive the impeller into the walls of the vessel creating significant friction. By

strategically positioning roller bearings inside the vessel, the effects of friction between the impeller and the vessel wall can be substantially reduced. Of course, high stresses at the interfaces between the ball bearings and the vessel wall or impeller result in a grinding of the mixing proteins and living cells, and loss of yield. Further, the bearings may be sensitive to corrosive reactions with water-based solutions and other media and will eventually deteriorate, resulting in frictional losses that slow the impeller, reduce the mixing action, and eventually also lead to undesirable contamination of the product. Bearings also add to the cleanup problems.

In an effort to address and overcome the limitations described above, still others have proposed levitated bearings designed to reduce the deleterious effects of friction resulting from magnetically coupled mixers. By using a specially configured magnetic coupler to maintain only a repulsive levitation force in the vertical direction, the large thrust force between the stirring and driving magnets can be eliminated, along with the resultant shear stress and frictional heating. An example of one such arrangement is shown in U.S. Patent No. 5,478,149 to Quigg.

However, one limitation remaining from this approach is that only magnet-magnet interactions provide the levitation. This leads to intrinsically unstable systems that produce the desired levitation in the vertical direction, but are unable to control side-to-side movement. As a result, external contact bearings in the form of bearing rings are necessary to laterally stabilize the impeller. Although this "partial" levitation reduces the friction

between the impeller and the vessel walls, it does not totally eliminate the drawbacks of the magnetically coupled, roller bearing mixers previously mentioned.

In an effort to eliminate the need for contact or other types of mechanical roller bearings, complex feedback control has been proposed to stabilize the impeller. Typical arrangements use electromagnets positioned alongside the levitating magnet. However, the high power level required to attain only sub-millimeter separations between the levitating magnet and the stabilizing magnets constitutes a major disadvantage of this approach. Furthermore, this solution is quite complex, since the stabilizing magnets must be actively monitored and precisely controlled by complex computer-implemented software routines to achieve even a moderate degree of stability. As a consequence of this complexity and the associated maintenance expense, this ostensible solution has not been accepted in the commercial arena, and it is doubtful that it can be successfully scaled up for use in mixing industrial or commercial scale process volumes.

Still others have proposed the use of superconductive materials to levitate magnetic bearings. Despite recent advances in the art, significant limitation on the application of this technology to mixing systems results from the extraordinarily cold temperatures required to create the desired superconductive effects. Even the recently discovered “high temperature” superconductors require temperatures on the order of 77 to 130 Kelvin to induce reliable, stable levitation in a magnetic bearing. In the past, the

relatively wide separation distance required between the bearing, the cryostat outer wall, and the superconducting element necessary to prevent unwanted cooling of the fluid has limited the industrial applicability of this approach. To date, applications of this technology to fluids have been primarily in the pumping of cryogenics or the like, such as those typically used in cold fusion experiments, in flywheels or other energy storage devices, or for space travel (see representative U.S. Patent No. 5,747,426 to Abboud or U.S. Patent No. 4,365,942 to Schmidt), where there is of course little concern for the inevitable cooling effect created.

In my prior U.S. Patent No. 5,567,672, I describe a levitating, magnetic "non-contact" bearing that is thermally separated from the superconducting element by the entirety of the double-walled vacuum jacket of the cryostat, which contains the cooling source used to cool the superconducting element. This separation reduces the thermal transfer between the cold superconducting element and the levitating bearing as well as the fluid being mixed, so that it could possibly be used in mixing temperature sensitive fluids, such as cell suspensions or blood. However, the resultant increased separation distance between the superconducting element and the bearing created by the double wall vacuum gap significantly decreases the stability and the load capacity of the bearing. This may limit the applications in which this arrangement is useful, and could especially preclude use with particularly viscous fluids or with the large volumes of fluid typically present in commercial scale operations.

Thus, a need is identified for an improved system having a levitating magnetic bearing for mixing or pumping fluids, and especially ultra-pure, hazardous, or delicate fluid solutions or suspensions. The system would preferably employ a magnetic bearing that levitates in a stable fashion to avoid contact with the bottom or side walls of the vessel. Since the bearing would levitate in the fluid, no mixing rod or other structure penetrating the mixing vessel would be necessary, thus eliminating the need for dynamic bearings or seals and all potentially deleterious effects associated therewith. Since penetration is unnecessary, the vessel could be completely sealed prior to mixing to avoid the potential for contamination and reduce the chance for exposure in the case of hazardous or biological fluids, such as contaminated blood or the like. The vessel and magnetic bearing could also be made of disposable materials and discarded after each use, which would eliminate the need for cleaning or sterilization. The absence of a mixing or stirring rod penetrating through the vessel would also allow a slowly rotating impeller to be held at an off-axis position in a sealed vessel, thus making it possible to independently rotate the vessel about its central axis to achieve very gentle, yet thorough, mixing.

In the case of warm or temperature-sensitive fluids, the use of superconductivity to provide the desired levitation would be possible by thermally isolating and separating the superconducting element from the magnetic bearing and providing a separate, substantially isolated cooling source. This combined thermal isolation and separation would avoid creating

any significant cooling in the vessel, the magnetic bearing or the fluid being mixed or pumped. The use of a superconductor would also eliminate the sole reliance on magnet-magnet repulsion to provide the levitation force and the concomitant need for active electronic control systems to ensure stable  
5 levitation. Overall, the proposed system would have superior characteristics over existing mixing or pumping technologies, especially in terms of sterility, mixing quality, safety and reliability, and would be readily adaptable for use in larger, industrial scale operations.

#### 10 **Summary of the Invention**

To meet these needs, and in accordance with a first aspect of the present invention as described herein, a number of systems that are capable of pumping or mixing fluids, including temperature sensitive fluids, using a magnetic bearing, impeller, rotor or other device capable of generating a  
15 pumping or mixing action in a fluid (hereinafter generically referred to as a "magnetic bearing") levitated by a superconducting element are disclosed. The magnetic bearing may be placed in a vessel positioned adjacent to the wall of a cryostat or other housing for the superconducting element. A separate cooling source thermally linked to the superconducting element  
20 provides the necessary cooling to create the desired superconductive effects and induce levitation in the magnetic bearing. The cryostat outer wall or other housing may define a chamber around the superconducting element. This chamber thermally isolates the superconducting element from the vessel

containing the bearing. To minimize thermal transfer from the superconducting element to the outer wall or housing, this chamber is preferably evacuated, but may be instead filled with an insulating material. This thermal isolation and separation means that the superconducting element  
5 may be placed in close proximity to the outer wall of the cryostat or other housing adjacent to the vessel to achieve a significant reduction in the separation distance between the levitating bearing and the superconducting element. This advantageously enhances the magnetic stiffness and loading capacity of the bearing as it levitates. However, since the superconducting  
10 element may be thermally isolated from the wall or housing, the magnetic bearing, and hence the vessel and fluid contained therein, are not exposed to the cold temperatures required to generate the desired superconductive effects. By using means external to the vessel to rotate one of the levitating magnetic bearing or the superconducting element, the desired pumping or mixing action  
15 is provided.

As should be appreciated from reviewing the foregoing description, several advantages may possibly be provided through the use of the mixing or pumping system of the present invention, depending in part upon the particular application. Since the rotating magnetic bearing levitates  
20 in the fluid, there is no mechanical stirrer or mixing rod extending through any wall of the vessel, which means that the vessel can be completely sealed from the outside environment, if desired. This eliminates the need for a dynamic bearing or seal and the concomitant problems with leakage, sterility, and the like, which makes the present arrangement particularly well suited for



use in pumping or mixing ultra-pure or hazardous fluids. Furthermore, exceptionally stable levitation of the magnetic bearing is provided by the minimal separation distance between the superconducting element and the magnetic bearing. Due to the thermal isolation and separation of the superconducting element from the cryostat wall, the system may even be used to pump or mix temperature sensitive fluids. In any case, contact-free, stable levitation reduces the incidence of frictional heating or unwanted shear stresses, both of which can have a significant deleterious effect on sensitive fluids, such as cell suspensions or the like.

In one possible embodiment, the magnetic bearing includes first and second spaced permanent magnets, which may be mounted at the opposite ends of a support shaft. The first magnet is placed in the fluid vessel closest to the outer wall of the cryostat such that it is levitated by the superconducting element. While those of skill in the art will understand that the polarity of the first permanent magnet is not critical for producing the desired levitation, it is preferred that it is disk-shaped and polarized in the vertical direction. This ensures that the magnetic field generated is substantially symmetrical and the desired stable levitation and free rotation relative to the vertical axis results.

The second permanent magnet forms a magnetic coupling with the motive device for rotating the magnetic bearing, which is preferably a drive magnet coupled to the rotating shaft of a motor. In applications where the stability of the magnetic bearing is particularly important, the drive magnet includes more than one magnet, and in the one embodiment has at least two sub-magnets that correspond to opposite polarity sub-magnets

forming a part of the second permanent magnet. In addition to creating the desired magnetic coupling for transmitting the driving torque, these cooperating sub-magnets produce an attractive force that balances with the levitational force provided by the superconducting element to keep the bearing properly balanced in the vertical direction. The cooperating sub-magnet pairs also keep the levitating bearing axially aligned and prevent side-to-side movement without the need for active control. In combination, the magnetic couplings created by the sub-magnet pairs allow the bearing to rotate in an exceptionally stable fashion. This reduces the chances of the bearing inadvertently contacting between the bottom and side walls of the vessel, and eliminates the need for electromagnets, roller bearings, or like structures found in prior art pumps or mixers.

In an alternate version of the magnetic bearing, at least one, and preferably a plurality of chambers are provided for holding a gas or other substance that is lighter than the fluid or other substance surrounding the bearing. These chambers serve to assist in levitating the magnetic bearing in the fluid, while the pinning forces created by the superconducting element simultaneously assist in keeping the magnetic bearing properly positioned at the desired location in the vessel. The chamber or chambers thus effectively reduce the amount of levitation force that must be supplied by the superconducting element.

The superconducting element may be formed of melt-textured Yttrium-Barium Copper Oxide (YBCO), which is a well-known high temperature, or "Type II," superconducting material, formed into a relatively

thin pellet. The thermal link between the superconducting element and the cooling source is created by an elongate rod formed of a material having desirable thermal transfer characteristics. Metals, such as copper, brass, aluminum, or the like, are particularly well-suited for this purpose, but the use  
5 of any other material having good thermal conductance/low thermal resistance is possible. The rod may be cylindrical in shape such that one end has a relatively large surface area that fully contacts and engages an entire face of the superconducting element to maximize thermal transfer. While one end of the rod supports the superconducting element in the chamber defined by the  
10 outer wall of the cryostat or other housing, which remains at room temperature, the opposite end is kept in thermal contact with the cooling source. The cooling source may take the form of a separate cooling chamber in the cryostat holding a cryogen at a temperature between 4.2 and 130 Kelvin, and most preferably liquid nitrogen at a temperature between  
15 approximately 65-80 Kelvin. Instead of liquid cryogens, the use of alternate means for cooling the rod is possible, such as providing a separate closed cycle refrigerator that is kept entirely outside of the cryostat or other housing for the superconducting element.

Since the magnetic bearing levitates without the need for a  
20 mixing rod or other form of driving shaft, it should be appreciated that the vessel containing the fluid may be completely sealed from the outside environment and used to mix, rather than pump, the fluid. By using such an arrangement, the potential for leakage or contamination during mixing is eliminated, as is the risk of exposing hazardous or biologically active fluids

to the environment. Forming the sealed vessel and the magnetic bearing from disposable materials is also possible, such that both can simply be discarded after mixing is complete and the fluid is retrieved or recovered, if necessary. This advantageously avoids the need for clean up or sterilization of the vessel and bearing.

Also, since there is no need for a dynamic bearing or seal for any drive shaft penetrating through a wall of the vessel, the vertical center axis of rotation of the magnetic bearing can be easily offset from the vertical center axis of the vessel. The vessel can then be rotated in a direction counterclockwise to the rotation of the bearing mounted in such an offset position. By doing so, gentle, yet thorough mixing may be provided in an efficient manner.

It should also be appreciated that other alternatives to a sealed vessel are possible. Of course, the vessel may simply be open to the ambient environment, as may be desired during the mixing of some solutions or suspensions that require exposure to open air to achieve a desired result. Alternatively, the vessel may be substantially sealed with only an inlet and an outlet, such that the rotating magnetic bearing/impeller provides pumping action to move the fluid through the vessel. Manufacturing the open top or substantially sealed vessel of disposable materials is also possible, such that both the vessel and magnetic bearing can simply be discarded after use to avoid the need for clean up or sterilization. The vessel can also be a flexible bag or other non-rigid type of container, the dimensions of which are essentially defined by the volume of fluid held therein.

As should further be appreciated, the system described above is based on the use of a stationary superconducting element and a magnetic bearing that includes a levitation magnet and separate "driven" magnets. The driving force is applied to the driven magnets from adjacent the top of the vessel, while the levitation force is provided by the other, levitating magnet adjacent to the bottom of the vessel. While this system provides the several advantages described above, in many practical applications, it is advantageous to keep the top of the mixing vessel or pumping head substantially clear from obstructions. For instance, if the mixing vessel includes a number of different ports and connections on the top, such as a filling port, temperature sensor connector, pH sensor connector, or the like, driving the levitating magnetic bearing from the top may interfere with these structures, thus possibly making operation somewhat inconvenient. This is also true in the case where the levitating magnetic bearing is used in a pumping chamber or centrifugal pumping head, where it is often desirable to place the fluid inlet in the top or upper wall of the vessel.

Moreover, in case of accidental decoupling of the driving magnet with the driven magnet at the opposite side of the levitating magnetic bearing, the shaft may lose vertical stability and fall into contact with the bottom or sides of the container. If this occurs, it is impossible to recover the stable levitation without opening the container, if sealed, or otherwise disturbing the fluid. This, of course, can lead to deleterious contamination.

Yet another reason for providing an alternative to the top driven arrangement is that it eliminates the need for a fixed height vessel or container

for holding the fluid. For example, in the case of where the vessel is in the form of a flexible bag, the vertical dimension of the bag often depends on the amount of fluid present, as well as the size and overall geometry of the bag itself. By magnetically driving a low-profile, levitating bearing or impeller in a stable, non-contact fashion from only the bottom of such a flexible plastic container, it could be of a reduced vertical dimension without compromising the degree of pumping or mixing action created.

Driving and levitating a magnetic bearing from the same side of the vessel also reduces the number of permanent magnets required. This is because the levitation magnets may simultaneously serve as the “driven” magnets. Eliminating the total number of magnets required not only reduces the materials cost, but also creates a bearing that is less complicated to manufacture.

Thus, another purpose of the present invention is to provide a magnetic bearing, and most preferably a low-profile, disk-shaped magnetic bearing or impeller (with or without blades, vanes, or the like) that is both levitated by a superconducting element and magnetically driven by means located outside of the vessel, and preferably on the same side of the vessel as the superconducting element. The magnetic bearing can thus be used for mixing or pumping fluids in a variety of vessels without regard to height, including flexible containers, such as bags or the like. Also, as described above, the magnetic bearing can be used along with a disposable plastic container (or with disposable impeller blades along with a disposable plastic pumping chamber or head).

To achieve this second goal, another version of a pumping or mixing system using a levitating magnetic bearing is disclosed. In this version, the thermally isolated superconducting element is contained within a wall defining a chamber that may be evacuated or insulated to create the  
5 desired thermal separation, as above, but instead of rotating the magnetic bearing including separate drive magnets, the motive device rotates both the wall and the superconducting element together. Accordingly, both the levitation and motive forces for the magnetic bearing are supplied by the same superconducting element (which actually can be formed of several component  
10 parts). To ensure proper rotation of the bearing, it includes at least two permanent magnets having different polarities that together create a non-symmetrical magnetic field with respect to the axis of rotation of the superconducting element. The bearing may also carry one or more blades or vanes to enhance the mixing or pumping action. In an alternate version of this  
15 embodiment, the cooling source may also be rotated along with the wall creating the chamber for thermally isolating the superconducting element (or may serve to couple the chamber to the motive device). In either case, the low-profile, magnet-carrying bearing may thus be efficiently and effectively levitated and rotated from the bottom of a vessel (or pumping chamber/head)  
20 resting on a stable support structure, while at all times remaining thermally separated and isolated from the cold superconducting element.

When using a vessel having a narrow opening, it may be difficult or impossible to insert the typical pancake or disk-shaped magnetic bearing in the fluid. Thus, an alternate version of a magnetic bearing, and one

especially adapted for use in the pumping or mixing system of this second embodiment, is disclosed. The magnetic bearing is in the form of a low-profile rod. Each end of the rod carries a magnet. These magnets may serve as both the levitating and the driven magnets in the case where the bearing is  
5 positioned above a rotating superconducting element.

In another version, two of the low-profile rods, each carrying at least two magnets having identical polarities, are pinned together, preferably at their centers. The rods are thus capable of rotating relative to each other to form a low-profile magnetic bearing that can easily pass through  
10 a narrow opening in a vessel. Since the magnets at the end of each rod have the same polarity, they not only serve to levitate and drive the bearing, but also repel each other to keep the rods from aligning when rotating in the vessel. Instead of or in addition to pinning the rods together, it is also possible to fabricate one or both rods of a flexible material, and possibly a  
15 single integral piece of material. As a result of the flexibility, the bearing formed from the rigidly coupled rods can be deformed to pass through any narrow opening in a vessel or container.

Despite the preference for using the system of this second possible embodiment for pumping or mixing temperature sensitive fluids in  
20 view of the beneficial nature of the thermal separation, it should be appreciated that it is possible to use it for pumping or mixing non-temperature sensitive or cryogenic fluids as well. For example, the evacuated housing or like chamber surrounding the rotating superconducting element can be eliminated altogether, since there is no need to thermally separate it from the



support structure for the vessel containing the magnetic bearing when a cold or non-temperature sensitive fluid is being pumped or mixed. Nevertheless, the desired stable, contact free levitation is still achieved.

In accordance with a third aspect of the present invention, the thermally isolated superconducting element provides the levitation, substantially as described above, while a separate motive device positioned adjacent to the superconducting element serves to rotate the magnetic bearing. In a most preferred version of this embodiment, the superconducting element is annular and positioned in a correspondingly shaped chamber defined by the outer wall of a cryostat or like device. This chamber may be evacuated or insulated to provide the desired thermal separation and isolation for the superconducting element. The wall also defines a bore or opening in the center of the chamber housing the superconducting element for receiving a portion of a motive device, such as a shaft carrying alternating polarity driving magnets at one end. The opposite end of the shaft is coupled to a motor also forming a part of the motive device. The magnetic bearing, in turn, carries a first "levitating" magnet corresponding in shape to the superconducting element, as well as at least two alternating polarity "driven" magnets that couple with the corresponding driving magnets. This magnetic coupling with the driven shaft serves to provide the desired rotation for the levitating bearing, while the superconducting element simultaneously serves to levitate the bearing in the vessel.

To provide the necessary cooling, a thermal link connects the superconducting element with a separate cooling source, such as a container

holding a suitable liquid cryogen or a closed-cycle refrigerator. Preferably, like the superconducting element, the rod and cooling source are each held in evacuated or insulated chambers to prevent any thermal transfer to or from the outside environment. In the case of evacuation, all three chambers are  
5 preferably in communication, but each may also be kept separate, such as by partitions, and individually evacuated or insulated. Thus, like the second embodiment, this system can also efficiently and effectively rotate a thermally isolated and separated magnetic bearing in a vessel containing a fluid to provide the desired pumping or mixing action. However, it should be  
10 appreciated that, like in the second embodiment, thermal separation is not a critical requirement, since the system of this embodiment could also be used to pump or mix non-temperature sensitive or cryogenic fluids as well.

In accordance with a fourth aspect of the invention, the vessel is in the form of a pipe containing a stationary or passing fluid. A  
15 correspondingly shaped superconducting element, which is preferably provided in two spaced component parts, surrounds the pipe. Each element is thermally separated and isolated from the outer surface of the pipe, such as by evacuating a chamber defined by a wall surrounding the element or filling it with insulation. A bearing positioned in the pipe carries levitating magnets  
20 corresponding in number to the components of the superconducting element and preferably positioned at each end of the bearing to ensure that a stable levitation force is achieved. As described above, the superconducting element may be thermally linked to a separate cooling source, such as a liquid nitrogen container, refrigerator, or the like. This link provides the necessary cooling

such that the superconducting element causes the magnetic bearing to levitate in the pipe in a stable and non-contact fashion.

To rotate the bearing, it may also carry a plurality of driven magnets that correspond to driving magnets positioned externally to the vessel and rotated by a motive device. Alternatively, a winding may be provided around the vessel and supplied with an electrical current to create an electric field that induces rotation in the driven magnets carried on or attached to the bearing. In either case, a levitating, rotating magnetic bearing is provided for “inline” use in a pipe or other narrow, elongated vessel.

In an alternate “inline” embodiment, the cryostat or other wall defining a chamber for housing the superconducting element is positioned in the vessel, such that the superconducting element aligns with and corresponds to a levitation magnet in the bearing, while separate, room-temperature driving magnets forming a part of a motive device correspond to and align with opposite polarity driven magnets in the bearing to form a magnetic coupling. The chamber is preferably evacuated or insulated to thermally isolate the superconducting element from the bearing and the surrounding fluid. A separate cooling source is also provided to supply the necessary cooling to the superconducting element to induce levitation in the bearing. The superconducting element and surrounding chamber may both be annular, as in the third embodiment. The inner wall creating this annular chamber also defines a bore for receiving the end of a driven shaft carrying the driving magnets for coupling with the adjacent driven magnets on the bearing. The bearing may also carry one or more blades or vanes to enhance the pumping

or mixing action.

In accordance with a fifth aspect of the present invention, an assembly for use in containing a fluid undergoing pumping or mixing is provided. The assembly comprises a vessel formed of a flexible disposable material capable of holding a fluid and a magnetic bearing positioned in the vessel. Thus, when used in conjunction with a pumping or mixing system wherein the magnetic bearing is levitated in the vessel by an adjacent superconducting element, both the vessel and the bearing can be disposed of when the pumping or mixing operation is complete and the fluid is recovered.

While not an exhaustive list, the vessel can be selected from the group of an open-top container, a pipe, a container having an inlet for receiving a flow of fluid and an outlet for expelling a flow of fluid, a sealed container, or a flexible bag. An attachment or cover containing a coupler comprised of a ferromagnetic material or the like may also be provided to keep the bearing in the proper position relative to the bag or vessel, such as during shipping or the like.

Ensuring that the magnetic bearing used in each system is both the proper one for that particular system and is sized appropriately may also be important. To do so, and in accordance with a sixth aspect of the invention, it is possible to provide a transmitter in one of the magnetic bearing or the vessel for generating a signal that is received by a receiver positioned elsewhere in the system (or vice versa), such as one positioned adjacent to the superconducting element. A controller for the system, such as a computer, can then be used to maintain the system in a non-operational, or "lock-out,"

condition until such time as the appropriate signal is received.

In accordance with a seventh aspect of the invention, a kit is also provided to assist in the set-up of any of the systems previously described. Specifically, it is necessary during field cooling to cool the superconducting element to below its transition temperature in the presence of a magnetic field in order to induce levitation in a permanent magnet producing the same magnetic field. This cooling process causes the superconducting element to "remember" the magnetic field, and thus produce the desired stable and reliable levitation each time a similar field is present. While it is possible to use the magnetic bearing to produce the magnetic field during field cooling, oftentimes the bearing will be pre-sealed in the vessel or container. This makes it difficult, if not impossible, to ensure that the magnet is properly aligned and spaced from the superconducting element during field cooling.

To overcome this problem, the kit of the present invention comprises at least one charging magnet having a size, shape, and magnetic field distribution identical to the levitation magnet contained in the particular bearing slated for use in one of the pumping or mixing systems previously described. The charging magnet is placed adjacent to the superconducting element during cooling, such as on the upper surface of the cryostat or other chamber surrounding the superconducting element (or a stable support structure for the bearing). Once cooling below the transition temperature is complete, the charging magnet may be removed and replaced with the vessel containing the corresponding magnetic bearing.

The kit or charging magnet may also comprise a spacer. This spacer allows the charging magnet to simulate the spacing of the magnetic bearing above the superconducting element to ensure that the desired levitation height is achieved once the vessel containing the actual bearing to be levitated is in position. The spacer is fabricated of a non-magnetic material to avoid interfering with the charging process. By also providing a variety of different sizes, shapes, and configurations of charging magnets (e.g., annular magnets), it is possible to easily perform field cooling for any size or shape of levitation magnet in the corresponding magnetic bearing.

During field cooling, and regardless of whether the magnetic bearing or a separate charging magnet is used to produce the charging magnetic field, it is possible to induce an undesired magnetic state in the superconducting element, such as if the position of the bearing or charging magnet is not correct during cooling. Since improper charging may prevent the magnetic bearing from levitating in a stable fashion, "recharging" the superconducting element may be required.

In accordance with an eighth aspect of the present invention, a heater may be provided adjacent to the superconducting element for use in facilitating recharging. More specifically, by activating this heater, the superconducting element may be quickly brought up from the transition temperature for recharging. Once the position of the bearing or charging magnet is adjusted or corrected, the heater may be turned off and the superconducting element once again allowed to cool to the transition temperature in the presence of the desired magnetic field. Of course, this

operation may be repeated as necessary until the desired stable levitation is achieved.

In many of the above-described embodiments, the pumping or mixing action is essentially localized in nature, since the bearing is rotated on a fixed axis relative to the vessel. This may be undesirable in some situations, such as where the vessel is relatively large, as compared to the magnetic bearing. Thus, in accordance with a ninth aspect of the invention, the particular system used to supply the pumping or mixing action may be provided with a motive device for physically moving the superconducting element (which may also be simultaneously rotated). Moving the superconducting element relative to the vessel will cause the levitating magnetic bearing to follow a similar path.

In accordance with a tenth aspect of the present invention, a method of levitating and rotating a magnetic bearing, such as for pumping or mixing a fluid in a vessel, is disclosed. The method includes the steps of placing a magnetic bearing in the vessel. Levitation is induced in the magnetic bearing by a superconducting element, which may be positioned in an insulated or evacuated chamber defined by the outer wall of a cryostat or other housing. If present, the chamber serves to thermally isolate and separate the vessel, fluid, and magnetic bearing from the superconducting element, which is thermally linked to a separate cooling source. Upon rotating one of the levitating magnetic bearing or the superconducting element in the vessel, the desired mixing or pumping action is provided. As described above, the magnetic bearing and vessel may also be formed of disposable materials and

discarded once mixing is complete and the fluid is recovered. Other methods are also disclosed for accomplishing the goals of the other embodiments previously described.

5     **Brief Description of the Drawings**

the accompanying drawings incorporated in and forming a part of the specification illustrate several aspects of the present invention and, together with the description, assist in explaining the principles of the invention. In the drawings:

10             Figure 1 is a partially cross-sectional, partially cutaway, partially schematic view of one embodiment of the system of the present invention wherein the levitating magnetic bearing is rotated by an external drive or driving magnet to mix a fluid in a vessel and the cooling source is a separate cooling chamber defined by the outer wall of a cryostat holding a  
15     cryogen;

Figure 2 is an enlarged cross-sectional, partially cutaway, partially schematic view of an embodiment wherein the rotating, levitating magnetic bearing is used to pump a fluid through a vessel positioned adjacent to the housing for the superconducting element and the cooling source is a  
20     closed cycle refrigerator;

Figure 3 is a partially cross-sectional, partially cutaway, partially schematic view of the system of the first embodiment wherein the superconducting element, vessel, magnetic bearing, and drive magnet are axially aligned, but moved off-center relative to the vertical center axis of the



vessel;

Figure 4a is a bottom view of the drive magnet used in situations where exceptional rotational stability of the magnetic bearing of the preferred embodiment is required;

5                Figure 4b is a partially cross-sectional, partially cutaway side view of the system showing the drive magnet of Figure 4a magnetically coupled to a similarly constructed second permanent magnet forming a part of the magnetic bearing;

10              Figure 4c is one possible embodiment of the pumping or mixing system including a bearing having a plurality of chambers for holding a substance that is lighter than the surrounding fluid, such as air, that assists in levitating the bearing;

15              Figure 5 is a partially cross-sectional, partially schematic side view of a second possible embodiment of a pumping or mixing system using a magnetic bearing levitated by a thermally isolated cold superconducting element wherein the motive force for rotating the bearing in the vessel is provided by rotating the superconducting element itself;

20              Figure 6a is a top schematic view of one possible arrangement of the levitating magnetic bearing that may be driven by a rotating superconducting element;

Figure 6b shows the bearing of Figure 6a levitating above a rotating superconducting element formed of two component parts;

Figure 7 is a partially cutaway, partially cross-sectional schematic side view of a vessel in the form of a centrifugal pumping head,

including a levitating, rotating magnetic bearing for pumping fluid from the inlet to the outlet of the centrifugal pumping head;

Figure 8a shows an alternate embodiment of a magnetic bearing especially adapted for use in a vessel or container having a relatively narrow opening;

Figure 8b shows another alternate embodiment of a magnetic bearing adapted especially for use in a vessel or container having a relatively narrow opening;

Figure 8c illustrates the magnetic bearing of Figure 8b in a partially folded state for insertion in the narrow opening of a vessel or container;

Figure 9 is a partially cross-sectional, partially schematic side view of a second embodiment of a pumping or mixing system wherein separate levitating and driven magnets are carried on the same, low-profile magnetic bearing, with the levitation being supplied by a thermally isolated superconducting element and the rotary motion being supplied a motive device including driving magnets coupled to a rotating shaft and positioned in an opening in the evacuated or insulated chamber for housing the superconducting element;

Figure 9a is a top or bottom view of one possible embodiment of a magnetic bearing for use in the system of Figure 9;

Figure 9b is a partially cross-sectional side view of the magnetic bearing of Figures 9 and 9a levitating above the superconducting element, and illustrating the manner in which the driven magnets are coupled to the

corresponding driving magnets to create the desired rotational motion;

Figure 10 is a top view of a most preferred version of a cryostat for use with the pumping and mixing system of the embodiment of Figure 9;

Figure 11 is a partially cutaway, partially cross-sectional side schematic view of a centrifugal pumping head for use with the system of Figure 9;

Figure 12 is a cross-sectional side view of another possible embodiment of a pumping or mixing system of the present invention;

Figure 12a is a cross-sectional view taken along line 12a-12a of Figure 12;

Figure 12b is a cross-sectional view taken along line 12b-12b of Figure 12;

Figure 12c is a cross-sectional view of the embodiment of Figure 12, but wherein the motive device is in the form of a winding around the vessel for receiving an electrical current that creates an electrical field and causes the magnetic bearing to rotate;

Figure 13 is an alternate embodiment of an inline levitating magnetic bearing, similar in some respects to the embodiment of Figure 9;

Figure 14 is an enlarged partially cross-sectional, partially cutaway side view showing the manner in which a sealed flexible bag carrying a magnetic bearing may be used for mixing a fluid, and also showing one example of how a transmitter and receiver may be used to ensure that the proper bearing is used with the system;

Figure 14a is an enlarged, partially cross-sectional, partially

cutaway side view showing an attachment including a coupler for coupling with the magnetic bearing;

Figure 14b is an enlarged, partially cross-sectional, partially cutaway side view showing the use of a second motive device in the system of Figure 14, such as a linear motion device, for moving the superconducting element, and hence, the magnetic bearing to and fro inside of the vessel;

Figure 15 illustrates one charging magnet including a spacer that may form part of a kit for use in charging the superconducting element as it is cooled to the transition temperature, as well as a heater for warming the superconducting element to above the transition temperature for recharging.

### **Detailed Description of the Invention**

Reference is now made to Figure 1, which shows a first possible embodiment of the mixing or pumping system 10 of the present invention. In this embodiment, a cryostat 12 is used to hold the cooling source for the superconducting element that produces the desired levitation in the magnetic bearing 14. The bearing 14 is placed in a vessel 16 positioned external to the cryostat 12, which may already contain a fluid F or may be filled after the bearing is in place. It should be appreciated at the outset that the term "fluid" is used herein to denote any substance that is capable of flowing, as may include fluid suspensions, gases, gaseous suspensions, or the like, without limitation. The vessel 16 for holding the fluid is shown as being cylindrical in shape and may have an open top. Alternatively, it may be completely

sealed from the ambient environment to avoid the potential for fluid contamination or leakage during mixing, or adapted to pump the fluid F from an inlet to an outlet in the vessel 16 (see Figure 2). In any case, the vessel 16 may be fabricated of any material suitable for containing fluids, including  
5 glass, plastic, metal, or the like. Of course, the use of lightweight plastic or other high density polymers is particularly desirable if the vessel 16 is going to be discarded after mixing or pumping is complete, as set forth in more detail in the description that follows.

As illustrated in Figure 1, the vessel 16 rests atop the outer wall  
10 18 of the cryostat 12. Preferably, this outer wall 18 is fabricated of non-magnetic stainless steel, but the use of other materials is of course possible, as long as the ability of the magnetic bearing 14 to levitate and rotate remains substantially unaffected. Positioned inside of and juxtaposed to this wall 18 is a superconducting element 20. The superconducting element 20 is  
15 supported by a rod 22 that serves as the thermal link between the superconducting element 20 and a separate cooling source 24. The outer wall 18 of the cryostat 12 defines a chamber 25 that is preferably evacuated to thermally isolate the cold superconducting element 20 from the relatively warm vessel 16, magnetic bearing 14, and fluid F. Positioning of the  
20 superconducting element 20 in this vacuum chamber 25 is possible by virtue of the thermal link provided by the rod 22. The thermal isolation and separation provided by the chamber 25 allows for the superconducting element 20 to be placed in very close proximity to the outer wall 18 without affecting its temperature, or the temperature of the vessel 16. This allows the

separation distance from the superconducting element 20 to the inner surface of the wall 18 to be narrowed significantly, such that in the preferred embodiment, the gap G between the two is under 10 millimeters, and can be as narrow as approximately 0.01 millimeters. This substantial reduction in the separation distance enhances the levitational stability, magnetic stiffness, and loading capacity of the bearing 14 without the concomitant cooling effects associated with prior art approaches for levitating magnetic bearings above cold superconducting elements.

In this first illustrated embodiment, the cooling source 24 is a separate, substantially contained cooling chamber 26 holding a cryogen C, such as liquid nitrogen. The chamber 26 is defined by an outer wall 28 that is substantially thermally separated from the outer wall 18 of the cryostat 12 to minimize heat transfer. An inlet I is provided through this wall 28 for introducing the cryogen into the cooling chamber 26. To permit any vapor P to escape from the chamber 26 as the cryogen C warms, an exhaust outlet O is also provided (see action arrows in Figure 1 also designating the inlet and outlet). In the illustrated embodiment, the inlet I and outlet O lines may be formed of a material having a low thermal conductivity, such as an elongate, thin walled tube formed of non-magnetic stainless steel, and are sealed or welded in place to suspend the cooling chamber 26 in the cryostat 12. As should be appreciated by one of ordinary skill in the art, the use of a thin walled tube formed of a material having a low thermal conductivity, such as stainless steel, results in a negligible amount of thermal transfer from the inlet or outlet to the wall 18. The sealing or welding method employed should

allow for the chamber 25 to be maintained in an evacuated state, if desired. Despite this illustration of one possible support arrangement, it should be appreciated that the use of any other support means that minimizes thermal transfer between the cooling chamber 26 and the cryostat wall or other housing 18 is also possible.

The rod 22 serving as the thermal link between the cooling source 24 and the superconducting element 20 may be cylindrical and may extend through the outer wall 28 of the cooling chamber 26. The entire surface area of the superconducting element 20 should contact the upper surface of the cylindrical rod 22 to ensure that thermal transfer is maximized. The rod 22 may be formed of materials having low thermal resistance/high thermal conductance, such as brass, copper, or aluminum.

As should be appreciated from viewing Figure 1, and as briefly noted in the foregoing description, the combination of the outer wall 18 and the inner cooling chamber 26 in this first embodiment defines the chamber 25 around the superconducting element 20. Preferably, this chamber 25 is evacuated to minimize heat transfer from the cooling chamber walls 28 and the superconducting element 20 to the outer wall 18 of the cryostat 12. The evacuation pressure is preferably at least  $10^{-3}$  torr, and most preferably on the order of  $10^{-5}$  torr, but of course may vary depending upon the requirements of a particular application. The important factor is that thermal transfer from the cooling source 24, which in this case is the cooling chamber 26 holding a cryogen C, and the superconducting element 20 to the outer wall 18 is minimized to avoid cooling the vessel 16 or fluid F held therein. Although a

vacuum chamber 25 is proposed as one preferred manner of minimizing this thermal transfer, the use of other means to provide the desired thermal isolation is possible, such as by placing insulating materials or the like in the chamber 25.

5                   As is known in the art, by cooling the superconducting element 20 in the presence of a magnetic field, it becomes capable of distributing the current induced by a permanent magnet such that the magnet levitates a certain distance above the superconducting element, depending primarily upon the intensity and the direction of the magnetic field generated by the  
10                   levitating magnet. Although basically a repulsive force is created, the peculiar nature of the pinning forces generated actually tie the levitating magnet to the superconducting element as if the two were connected by an invisible spring. As should be appreciated, this form of attachment cannot be achieved in conventional levitation schemes for magnetic bearings that  
15                   employ two opposed permanent magnets that merely repel each other, since no pinning forces act to tie the two magnets together, while at the same time provide a balancing repulsive force.

                  In the preferred embodiment of the present system 10, the element 20 providing the superconductive effects is a "high temperature" or  
20                   "type II" superconductor. Most preferably, the superconducting element 20 is formed of a relatively thin cylindrical pellet of melt-textured Yttrium-Barium Copper Oxide that, upon being cooled to a temperature of approximately 77-78 Kelvin using a cooling source 24, such as the illustrated liquid nitrogen chamber 26, exhibits the desired levitational properties in a



permanent magnet. Of course, the use of other known superconducting materials having higher or lower operating temperatures is also possible, and my prior U.S. Patent No. 5,567,672 is incorporated herein by reference for, among other things, the other high-temperature superconducting materials  
5 referenced therein.

The magnetic bearing 14 in the preferred embodiment includes a first permanent magnet 32 for positioning in the vessel 16 adjacent to the superconducting element 20 such that it levitates in the fluid F. Although the polarity of this first magnet 32 is not critical to creating the desired levitation,  
10 the magnet 32 is preferably disk-shaped and polarized in the vertical direction. This ensures that a symmetrical magnetic field is created by the magnet 32 and stable levitation results above the superconducting element 20, while at the same time free rotation relative to the vertical axis is possible.

In a version of the magnetic bearing 14 particularly adapted for use in relatively deep fluid vessels, a support shaft 34 is connected to and  
15 extends vertically from the first permanent magnet 32. Along the shaft 34, at least one, and preferably two, impeller assemblies 36 are carried that serve to provide the desired pumping, or in the case of Figure 1, mixing action when the magnetic bearing 14 is rotated. Rotation of the levitating magnetic  
20 bearing 14 in the vessel 16 is achieved by a magnetic coupling formed between a second permanent magnet 38 (shown in dashed line outline in Figure 1, but see also Figure 2) and a drive magnet 40 positioned externally of the vessel 16. The drive magnet 40 is rotated by a drive means, such as an electric motor 42 or the like, and the magnetic coupling formed with the

second permanent magnet 38 serves to transmit the driving torque to the bearing 14 to provide the desired pumping or mixing action. The direction of rotation is indicated by the action arrows shown in Figures 1 and 2 as being in the counterclockwise direction, but it should be appreciated that this direction is easily reversed by simply reversing the direction in which the drive magnet 40 is rotated.

In operation, and in practicing one possible method of pumping or mixing a fluid disclosed herein, the vessel 16 containing the fluid F and magnetic bearing 14 are together placed external to the wall 18 of the cryostat 12 adjacent to the superconducting element 20, which is placed in the evacuated or insulated chamber 25. When the first disk-shaped permanent magnet 32 is brought into the proximity of the superconducting element 20, the symmetrical magnetic field generated causes the entire bearing 14 to levitate in a stable fashion above the bottom wall of the vessel 16. This levitation brings the second permanent magnet 38 into engagement with the drive magnet 40 to form the desired magnetic coupling. In addition to transmitting the driving torque, this magnetic coupling also serves to stabilize rotation of the magnetic bearing 14. The motor 42 or other motive device is then engaged to cause the drive magnet 40 to rotate, which in turn induces a steady, stable rotation in the bearing 14. Rotating impeller assemblies 36 then serve to mix or pump the fluid F in a gentle, yet thorough fashion.

Since the bearing 14 fully levitates and can be completely submerged in the fluid, the need for mixing or stirring rods penetrating through the vessel 16 in any fashion is eliminated. The concomitant need for

dynamic shaft seals or support bearings in the vessel walls is also eliminated. A related advantage is that the vessel 16 containing the fluid F and the magnetic bearing 14 can be completely sealed from the outside environment before mixing to provide further assurances against leakage or contamination.

5 Yet another related advantage discussed in detail below is that the vessel 16 and magnetic bearing 14 can be formed of relatively inexpensive, disposable materials and simply discarded once mixing is complete. As should be appreciated, this advantageously eliminates the need for cleanup and sterilization of the magnetic bearing 14 and vessel 16. Thus, by completely  
10 sealing a disposable vessel, such as a plastic container or flexible bag containing the magnetic bearing and fluid prior to mixing, the entire assembly can simply be discarded once the fluid contents are recovered. This reduces the risk of exposure both during and after mixing in the case of hazardous fluids, and also serves to protect the fluid from contamination prior to or  
15 during the pumping or mixing operation.

An alternative version of this first possible embodiment of the system 10 of the present invention particularly adapted for pumping a fluid F is shown in Figure 2. In this version, the vessel 16 includes at least one fluid inlet 44 and at least one outlet 46. The magnetic bearing 14 preferably carries  
20 rotating impeller assemblies 36 that serve to provide the desired pumping action by forcing fluid F from the inlet 44 to the outlet 46 (see action arrows). By increasing or decreasing the rotational speed of the motor 42 or other motive device, or adjusting the size, shape or style of the bearing 14, impeller blades 36, or substituting a different design altogether, a precise level of

pumping action may be provided.

Another possible modification shown in Figure 2 is to use a closed cycle refrigerator 48 to provide the necessary cooling for the superconducting element 20 instead of a cryostat with a liquid cryogen as the cooling source. The refrigerator 48 can be positioned externally to a housing 18 containing the superconducting element 20, which may be the equivalent of the cryostat outer wall 18 previously described. As with the first embodiment, a chamber 25 is defined by the housing 18. This chamber 25 is preferably evacuated or filled with other insulating materials to minimize thermal transfer from the superconducting element 20 to the housing 18. However, since no cooling source 24 is contained within the housing 18, it is not actually a "cryostat" as that term is commonly defined. Nevertheless, the desired dual levels of thermal separation are still possible, and the concomitant advantages provided, since: (1) the cooling source 24, 48 is positioned away from the housing 18 and, thus, the vessel 16, magnetic bearing 14, and fluid F; and (2) the housing 18 still separates and defines a chamber 25 that thermally isolates the superconducting element 20 and the vessel 16. In yet another alternate arrangement, the refrigerator 48 can be used as a primary cooling source, with the cryogenic chamber (not shown) serving as a secondary or "backup" cooling source in the event of a power outage or mechanical failure.

In accordance with another of the many important aspects of the present system 10, the absence of a mixing rod or other mechanical stirrer extending through a wall of the vessel 16 also allows for placement of the

magnetic bearing 14 at an off-axis position, as shown in Figure 3. Specifically, the superconducting element 20, magnetic bearing 14, and drive magnet 40 are all axially aligned away from the vertical center axis of the vessel 16. One particular advantage of using this approach is that the magnetic bearing 14 may be rotated at a very low speed while the vessel 16 is also rotated about its center axis. This advantageously ensures that gentle, yet thorough mixing, is achieved, which is particularly advantageous for use with fluids that are sensitive to shear stress. As should be appreciated, this arrangement can be used both whether the vessel 16 is completely sealed, provided with an inlet 44 and an outlet 46 for pumping as shown in Figure 2, or open to the ambient environment. For purposes of illustration only, Figure 3 shows the cryostat 12 of the embodiment shown in Figure 1 having an outer wall 18 and a cooling chamber 26 defined by a wall 28. However, it should be appreciated that use of the housing 18 and closed-cycle refrigerator 48 of the second embodiment of Figure 2 as part of the "cryostat" is also possible with this arrangement.

Through experimentation, it has been discovered that when the magnetic bearing 14 of the type described for use in this first possible embodiment is employed, providing the requisite degree of stability to ensure that all contact with the side walls of the container 16 is avoided may in some instances be a concern. Thus, to ensure that the magnetic bearing 14 rotates with exceptional stability and such deleterious contact is completely avoided, the second permanent magnet 38 and the drive magnet 40 are each provided with at least two pairs, and preferably four pairs of cooperating sub-magnets

50a, 50b. As shown in Figures 4a and 4b, these magnets 50a, 50b have opposite polarities and thereby serve to attract each other and prevent the levitating magnetic bearing 14 from moving from side-to-side to any substantial degree. However, the attractive force is counterbalanced by the combined spring-like attractive and repulsive levitational/pinning forces created between the first permanent magnet 32 and the superconducting element 20 when cooled. This avoids the potential for contact with the upper wall of the vessel 16, if present. Overall, the magnetic bearing 14 is capable of exceptionally stable rotation using this arrangement, which further guards against the undesirable frictional heating or shear stress created if the rotating bearing 14, or more particularly, the first and second permanent magnets 32, 38 or the blades of the impeller assemblies 36 could move into close proximity with the bottom or side walls of the vessel 16.

As should be appreciated, it is possible to rearrange the components of the system 10 such that the levitation and driving forces are provided from other areas of the vessel, rather than from the top and bottom of the vessel. Thus, as shown in Figure 4c, the cryostat 12 or other housing for containing the superconducting element 20 may be positioned adjacent to one side of the vessel 16, while the drive magnet 40 is positioned adjacent to the opposite side. In that case, the bearing 14 may be turned on its side and supported by a separate stable support structure, such as a table T or the like. The vessel 14 is shown as being sealed, but it should be appreciated that any of the vessels disclosed herein may be employed instead, including even a pipe.

To assist in levitating the bearing 14 in either the embodiment of Figures 1 or 2 or the other embodiments disclosed herein, at least one, and preferably a plurality of chambers 60 are provided for containing a substance that is lighter than the surrounding fluid F. The chambers 60 may be provided adjacent to each magnet 32, 38 in the bearing 14, as well as around the shaft 34, if desired. In the preferred embodiment where the fluid F is or has a specific gravity similar to that of water, the substance contained in the chambers 60 may be air. However, in more viscous fluids, such as those having a specific gravity more like glycerin, it may be possible to use lighter fluids, such as water, even lighter gases, or combinations thereof. These chambers 60 thus serve to assist in levitating the bearing 14 by helping it “float” in the fluid F. However, the “pinning” force created by the superconducting element 20, plus the levitating and aligning force created between the second permanent magnet 38 and the driving magnet 40, both also serve to assist in keeping the bearing 14 in the proper position as it rotates. In the case of disk or pancake shaped permanent first and second magnets 32, 48 and a cylindrical shaft 34, each chamber 60 is preferably annular. Instead of fluid-filled chambers, the use of other buoyant materials is also possible to provide the levitation-assist function.

As previously mentioned, one of the many advantages of the system 10 of the present invention is that, since the magnetic bearing 14 levitates in the fluid F and no mixing or stirring rods are required for rotation, the vessel 16 can be completely sealed from the outside ambient environment. Thus, by forming the bearing 14 and vessel 16 of relatively inexpensive or

disposable materials, both can simply be discarded after mixing is completed and the fluid F is recovered. Of course, such disposable materials can also be used to form the vessel 16 designed for pumping fluids (Figure 2), or to form the open-top container for mixing fluids to avoid the need for clean up or sterilization once the operation is complete.

It should also be appreciated that the magnetic bearing 14 illustrated is an example of one preferred arrangement only, and that other possible configurations are possible. For instance, impeller blades are not required, since a disk-shaped magnetic bearing itself will create some mixing action simply by rotating. If present, the blade or blades could simply be placed circumferentially around the disk-shaped first permanent magnet 32 to reduce the length of the shaft 34, or eliminate it altogether, especially if the vessel 16 has a relatively small vertical dimension. Instead of a bladed impeller assembly 36, the use of other structural arrangements is also possible, such as disk-shaped wheels having vanes or like structures designed to create more or less efficient rotation, and a concomitant increase in the desired mixing or pumping action when rotated. Depending on the depth of the vessel 16, the length of the shaft 34, if present, can also be increased or decreased as necessary. All components forming the magnetic bearing in any embodiment described above may be coated with TEFLON or other inert materials to reduce the chances of contamination or corrosion, as well as to facilitate clean up, if required.

Of course, besides use in the mixing or pumping of small batches of fluid solutions or suspensions used during experimentation and



research in the laboratory setting, all components are also easily scaled up for use in industrial or commercial pumping or mixing operations, such as those commonly used in the manufacture of pharmaceuticals on a large-scale basis. The levitation of the magnetic bearing can still be readily achieved in systems  
5 of much greater capacity than the one shown for purposes of illustration in the drawings, thus making the present arrangement particularly well-suited for the commercial production of pharmaceuticals or any other solutions or suspensions that require gentle, yet thorough mixing during processing.

Experiments conducted to date have demonstrated the efficacy  
10 of the system 10 described above. The set-up utilized in conducting these experiments included a magnetic bearing having axially aligned upper and lower magnets and an impeller assembly mounted on a vertically extending support shaft, as shown in Figure 1. A cylindrical pellet of melt-textured  $\text{YBa}_2\text{Cu}_3\text{O}_{7+x}$  having a diameter of 30 millimeters and a thickness of 25  
15 millimeters was used as the superconducting element and placed in a cryostat having a configuration similar to the one shown in Figure 1. The cryostat included a cooling chamber filled with approximately 1 liter of liquid nitrogen. A Nd-Fe-B permanent magnet with a surface field intensity of 0.4 Tesla was used as the lower, first permanent magnet.

20 Experiments conducted using this set-up demonstrated that the desired exceptionally stable levitation of the magnetic bearing above the top surface of the cryostat in a vessel filled with a relatively warm fluid was possible. A separation distance of up to seven millimeters was achieved, and the levitation was stable for up to five hours using just a liter of liquid

nitrogen as the cryogen. In the first experiment using this set up, water was selected as a model low viscosity fluid. Rotational speeds of up to 600 rpm were achieved – this upper limit being defined by only the limited capabilities of the motor used to rotate the drive magnet in this experiment. No  
5 decoupling or instability in the magnetic bearing was observed at any speed. In the case of glycerin, a model high viscosity fluid, a maximum rotational speed of 60 rpm was achieved before some decoupling of the magnetic bearing was observed. To further demonstrate the mixing capabilities using the proposed system, SEPHADEX powder (dry bead, 50-150 micron  
10 diameter) was placed on the bottom of a water-filled vessel and the levitating magnetic bearing rotated. A uniform suspension was achieved after approximately five minutes of mixing.

As should be appreciated, the system 10 described above and shown in Figures 1-4 is based on a stationary superconducting element 20 and  
15 a magnetic bearing 14 that, in addition to a “levitation” magnet, includes one or more separate driven magnets for coupling with a drive mechanism positioned at the opposite end of the vessel or container relative to the superconducting element. However, other embodiments of the pumping or mixing system may include a levitating, rotating bearing with magnets that are  
20 simultaneously used not only for levitation, but also for transmitting driving torque. In one embodiment, this driving torque is provided by the pinning forces that couple the magnetic bearing with a rotating superconducting element. Thus, the superconducting element causes the bearing to rotate, even though there is no physical contact between the two elements.

More specifically, and in accordance with this second possible embodiment of the present invention illustrated in Figure 5, the pumping or mixing system 100 includes a cryostat 102, which may be formed of two separate components: a first component 102a including an outer wall 104 that surrounds a relatively thin, disk-shaped superconducting element 106 to define a chamber 108, and a second component 102b including the cooling source 110. Preferably, the outer wall 104 is formed of thin, non-magnetic material, such as non-magnetic stainless steel or the like, but the use of other materials is possible, as long as they do not interfere with the operation of the system 100 and have relatively poor thermal conductivity. The chamber 108 surrounding the superconducting element 106 may be evacuated or insulated as described above to thermally isolate and separate it from the wall 104. However, as noted further below, it is possible to eliminate the chamber 108 entirely in the case where a non-temperature sensitive fluid is being pumped or mixed.

In the case where the chamber 108 is evacuated, a valve 112 may be provided in the outer wall 104 for coupling to a vacuum source, and an optional getter 114 (such as an activated carbon insert or the like) may be positioned in the chamber 108 for absorbing any residual gases and ensuring that the desired evacuation pressure is maintained. As with the embodiments described above, the evacuation pressure is preferably on the order of  $10^{-3}$  torr or greater.

The superconducting element 106 is supported in the chamber 108 independent of the outer wall 104 of the first portion 102a of the cryostat

102. The support may be provided by a platform 116 that is in turn enclosed by wall 104 and supported at one end of an elongated thermal link 118, preferably formed of metal or another material having a high degree of thermal conductivity (e.g., 50 Watts/Kelvin or higher). To supply the necessary cooling to the superconducting element, the opposite end of the elongated thermal link 118 is positioned in contact with the cooling source 110, which as described above forms a part of the second component 102b of the “cryostat” 102 (the term cryostat being used throughout to denote a structure or combination of structures that are capable of holding and maintaining a superconducting element in a cold state, whether forming a single unit or not). The cooling source 110 is illustrated as an open-top container 119, such as a Dewar flask, containing a liquid cryogen C, such as nitrogen. However, it is also possible to use a closed-cycle refrigerator or any other device capable of supplying the cooling necessary to levitate a magnet above a superconducting element after field cooling is complete. In the case where the wall 104 of the first portion 102a of the cryostat 102 makes contact with the cryogenic fluid C, as illustrated, it should be appreciated that there is only negligible thermal transfer to the portion of the wall 104 adjacent the vessel, since: (1) the wall 104 may be formed of a thin material having low thermal conductivity; and (2) the portion of the wall 104 adjacent to the vessel is surrounded by the ambient, room-temperature environment.

To permit the superconducting element 106 to rotate, a roller bearing assembly 120 comprising one or more annular roller bearings 122 supports the first portion of the cryostat 102a, including the wall 104 defining

the chamber 108. As should be appreciated from viewing Figure 5, these roller bearings 122 permit the first portion of the cryostat 102a housing the superconducting element 102 to rotate about an axis, which is defined as the axis of rotation. A bearing housing 124 or the like structure for supporting the bearing(s) 122 is secured to an adjacent stable support structure 126. In the illustrated embodiment, a motive device includes an endless belt 128 that serves to transmit rotational motion from the pulley 129 keyed or attached to the shaft 130 of a motor 131 to the first portion of the cryostat 102a. The motor 131 may be a variable speed, reversible electric motor, but the use of other types of motors to create the rotary motion necessary to cause the superconducting element 106, and more particularly, the first portion of the cryostat 102a housing the superconducting element 106, to rotate is possible.

The vessel 132 containing the fluid to be mixed (which as described below can also be in the form of a centrifugal pumping head for transmitting a fluid) is positioned adjacent to the rotating superconducting element 106, preferably on a stable support surface T fabricated of a material that does not interfere with the magnetic field created by the bearing 134. As previously noted, the vessel 132 can be a rigid vessel of any shape (open top, sealed having an inlet or outlet, cylindrical with a hollow center, such as a pipe, or even a flexible plastic bag (by itself, with rigid inserts, or inserted into a rigid or semi-rigid vessel)). The only requirement is that the vessel 132 employed is capable of at least temporarily holding the fluid F (or gas) being mixed or pumped.

To create the desired mixing action in this embodiment, a

magnetic bearing 134 is positioned in the vessel 132 and simultaneously levitated and rotated by the superconducting element 106. More specifically, the first portion of the cryostat 102a containing the superconducting element 106, thermal link 118, and the evacuated chamber 108 is rotated as a result of the rotational motion transmitted by the endless belt 128. This rotation causes the magnetic bearing 134 in the vessel 124 to rotate and either pump or mix the fluid F held therein. In the case where the chamber 104 is evacuated or insulated, the bearing 134 is rotated in a stable, reliable fashion while the desired thermal separation between the cold superconducting element 106 supplying the levitation force, the vessel 124, and hence the fluid F, is achieved. The magnetic bearing 134 may include a plurality of mixing blades B (see Figures 6a and 6b), vanes V (not shown, but see Figure 7), or like structures to create an impeller. However, again referring back to Figure 5, a low-profile, disk-shaped magnetic bearing 134 may also be used to provide the desired mixing action, especially for particularly delicate fluids, such as blood or other types of cell suspensions.

As perhaps best understood by viewing Figures 6a and 6b together, the magnetic bearing 134 includes at least two magnets 135a, 135b. These magnets 135a, 135b not only serve to generate the magnetic field that causes the bearing 134 to levitate above the superconducting element 106, but also transmit rotational motion to the bearing. As should be appreciated by one of ordinary skill in the art, the magnetic field generated by the magnets 135a, 135b must be axially non-symmetrical relative to the axis of rotation of the superconducting element 106 in order to create the magnetic coupling

necessary to efficiently transmit the rotary motion. In one embodiment, the magnets 135a, 135b are disk-shaped and polarized along a center vertical axis (see Figure 6b, showing permanent magnets 135a, 135b of alternating polarities (S-South; N-North) levitating above a pair of superconducting elements 106a, 106b, with the corresponding action arrows denoting the direction and axis of polarity). These magnets 135a, 135b can be fabricated from a variety of known materials exhibiting permanent magnetic properties, including, but not limited to, Neodymium-Iron-Boron (NdFeB), Samarium Cobalt (SmCo), the composition of aluminum, nickel, and cobalt (Alnico), ceramics, or combinations thereof. The magnets 135a, 135b may be connected by a piece of a matrix material M, such as plastic. Alternatively, the magnets 135a, 135b may each be embedded in separate pieces of a matrix material M, or may be embedded in a single unitary piece of material (not shown). Also, as previously mentioned, the bearing 134 may carry one or more optional blades B, vanes or like structures to enhance the degree of pumping or mixing action supplied by the bearing upon being rotated.

In another possible embodiment, the second portion of the cryostat 102b including the cooling source (either a liquid cryogen container (open top, sealed with inlet/outlet ports, or a refrigerator)) may be rigidly attached to the first portion 102a and both components may be simultaneously rotated together (see the dashed lines at the top of the open cooling container 119 in Figure 5). The rotational motion may be supplied by an endless belt/motor combination, as described above, or alternatively may be provided through a direct coupling between the second portion of the cryostat 102b (comprising

any type of cooling source) and an inline shaft of a motor or similar motive device (not shown).

As briefly mentioned above, it is possible to use this embodiment of the system 100 without evacuating, insulating, or otherwise thermally separating the superconducting element 106 from the ambient environment, such as for mixing or pumping cold (cryogenic) or non-temperature sensitive fluids. In that case, there is no specific need for a wall 104 or chamber 108 surrounding the superconducting element 106, since there is no need to thermally separating it from the structure supporting the vessel 132. Even with this modification, reliable and stable levitation of the bearing 134 is still achieved.

From the foregoing, it should be appreciated that the same driving mechanism and cryostat shown in Figure 5 can be used for pumping a fluid instead of mixing it. One version of a vessel 132 in the form of a centrifugal pumping head 150 is shown in Figure 7. This pumping head 150 includes a pumping chamber 152 having an inlet 154 and an outlet 156 (which of course, could be reversed, such as in a non-centrifugal pumping head (see Figure 2)). The chamber 150 contains the levitating magnetic bearing 158, which as shown may include a plurality of vanes V, or may alternatively carry a plurality of blades (not shown). At least two permanent magnets 160a, 160b having different polarities are embedded or otherwise included in the bearing 158, which may be substantially comprised of an inert matrix material M having any particularly desired shape to facilitate the pumping or mixing action. As described above, these magnets 160a, 160b provide both levitation



and torque transmission as a result of the adjacent rotating superconducting element 106.

As should be appreciated, one advantage of providing the driving force for the levitating bearing 158 from the same side of the vessel/pumping head 150 from which the levitating force originates is that the fluid inlet 154 (or outlet 156, in the case where the two are reversed) may be placed at any location along the opposite side of the vessel/pumping head 150, including even the center, without interfering with the pumping or mixing operation. Also, this same side of the vessel/pumping head 150 may be frusto-conical or otherwise project outwardly, as illustrated, without interfering with the driving operation or necessitating a change in the design of the magnetic bearing 134, 158.

As briefly noted above, in some instances the opening in a vessel may be too small to permit an even moderately sized bearing 134 to be inserted into the fluid F. In such a case, alternate versions of a bearing 134 meeting this particular need are shown in Figures 8a-8c. In the first alternate version, the bearing 134a is in the form of a slender rod formed of an inert matrix material M carrying one of the levitating/driven magnets 135a, 135b at or near each end. As should be appreciated, this bearing 134a may be easily turned to an upstanding position and inserted in the opening. Upon then coming into engagement with the rotating superconducting element 106, the bearing 134a would simultaneously levitate and rotate to pump or mix a fluid held in the vessel. To further facilitate insertion in the narrow opening, the matrix material M may be an elastomeric material or another material having

the ability to freely flex or bend.

A second version of a bearing 134b for use with a vessel having a narrow opening is shown in Figure 8b. The bearing 134b includes first and second thin rods 180 formed of a matrix material M. The rods 180 each carry  
5 the levitating/driven magnets 135a, 135b at each end thereof, with at least two magnets having the identical polarity being held on each different rod. In one version, the rods 180 are pinned about their centers (note connecting pin 182) and are thus capable of folding in a scissor-like fashion. As should be appreciated from Figure 8c, this allows the bearing 134b to be folded to a  
10 low-profile position for passing through the opening of the vessel 124. The rods 182 of the bearing 134b may then separate upon coming into engagement with the rotating superconducting element 106 positioned adjacent to the bottom of the vessel 132. Since magnets 135a or 135b having the same polarity are positioned adjacent to each other, the corresponding ends of the  
15 rods 180 repel each other as the bearing 132b rotates. This prevents the rods 180 from assuming an aligned position once in the vessel 132. As should be appreciated, instead of pinning two separate rods 180 together to form the bearing 134b, it is also possible to integrally mold the rods 180 of a flexible material to form a cross. This would permit the rods 180 of the bearing 134b  
20 to flex for passing through any narrow opening, but then snap-back to the desired configuration for levitating above the superconducting element 106.

In accordance with yet another aspect of the present invention, a third version of a pumping or mixing system 200 is disclosed. In this third embodiment, which is illustrated in Figures 9, 9a, 9b, and 10, the forces for

driving and levitating the magnetic bearing 204 are supplied from the same side of a fluid vessel 202 (which is shown as an open-top container, but as described above, could be a sealed container, a pumping chamber or head, a flexible bag, a pipe, or the like). In this system 200, the magnetic bearing

5 204 actually includes two magnetic subsystems: a first one that serves to levitate the magnetic bearing 204, which includes a first magnet 206, preferably in the form of a ring, and a second magnetic subsystem that includes at least two alternating polarity driven magnets 208a, 208b, preferably positioned inside of the first, ring-shaped magnet 206, to transmit

10 driving torque to the bearing (see Figures 9a and 9b).

Figure 9 shows one embodiment of the overall system 200 in which the ring-shaped permanent magnet 206 provides the levitation for the magnetic bearing 204. Polarization of the ring magnet 206 is vertical (as shown by the long vertical arrows in Figure 9b). The driven magnets 208a,

15 208b are shown being disk-shaped and having opposite or alternating polarities (see corresponding short action arrows in Figure 9b representing the opposite polarities) to form a magnetic coupling and transmit the torque to the levitating magnetic bearing 204. Levitation magnet 206 and driven magnets 208a, 208b are preferably integrated in one rigid structure such as by

20 embedding or attaching all three to a lightweight, inert matrix material M, such as plastic or the like.

To correspond to the ring-shaped levitation magnet, the superconducting element 210 for use in this embodiment is annular, as well. This element 210 can be fabricated of a single unitary piece of a high-

temperature superconducting material (YBCO or the like), or may be comprised of a plurality of component parts or segments. Upon being cooled to the transition temperature in the presence of a magnetic field and aligning with the ring-shaped permanent magnet 206 producing the same magnetic field, the superconducting ring 210 thus provides the combined repulsive/attractive, spring-like pinning force that levitates the magnetic bearing 204 in the vessel 202 in an exceptionally stable and reliable fashion. In Figure 9, the vessel is shown as being supported on the outer surface of a special cryostat 220 designed for use with this system 200, a detailed explanation of which is provided in the description that follows. However, it is within the broadest aspects of the invention to simply support the vessel 202 on any stable support structure, such as a table (not shown), as long as it remains sufficiently close to the superconducting element 210 to induce the desired levitation in the magnetic bearing 204 held therein.

As in the embodiments described above, a motive device is used to impart rotary motion to the bearing 204, and is preferably positioned adjacent to and concentric with the annular superconducting element 210. One example of a motive device for use in the system 200 of this third embodiment includes driving magnets 212a, 212b that correspond to the driven magnets 208a, 208b on the bearing 204 and have opposite polarities to create a magnetic coupling (see Figure 9). The driving magnets 212a, 212b are preferably coupled to a shaft 214 also forming part of the motive device. The driving magnets 212a, 212b may be attached directly to the shaft 214, or as illustrated in Figure 9, may be embedded or attached to a matrix material

(not numbered in Figure 9, but see Figure 9b). By positioning the driving magnets 212a, 212b close to the bearing 204, such as by inserting them in the opening or bore 219 defined by the annular superconducting element 210, and rotating the shaft 214 using a motor 216 also forming a part of the motive device, synchronous rotation of the levitating magnetic bearing 204 is induced. The magnetic bearing 204 may include one or more blades B that are rigidly attached to the ring or levitation magnet 206 (or any matrix material forming the periphery of the bearing 204). However, it remains within the broadest aspects of the invention to simply use a smooth, low-profile bearing (see Figure 5) to provide the desired mixing action.

As shown in Figures 9 and 10 and briefly mentioned above, the mixing or pumping system 200 including the bearing 204 comprised of the magnetic levitation ring 206 and separate driven magnets 208a, 208b may use a special cryostat 220 to ensure that reliable and stable rotation/levitation is achieved. As perhaps best shown in the cross-sectional side view of Figure 9, the cryostat 220 includes a separate cooling source 221 for indirectly supplying the necessary cooling to the superconducting element 210, which as described below is supported and contained in a separate portion of the special cryostat 220. In the illustrated embodiment, the cooling source 221 (not necessarily shown to scale in Figure 9) includes a container 222, such as a double-walled Dewar flask, in which a first chamber 224 containing a liquid cryogen C (nitrogen) is suspended. A second chamber 223 defined around the first chamber 224 by the double wall container 222 is preferably evacuated or insulated to minimize thermal transfer to the ambient environment, which is

normally at room temperature. A port 226 is also provided for filling the suspended chamber 222 with the chosen liquid cryogen C, as well as for possibly allowing any exhaust gases to escape. As with the first and second embodiments described above, the cooling source 221 may instead take the  
5 form of a closed-cycle refrigerator (not shown), in which case the double wall container 222 may be entirely eliminated from the system 200.

A thermal link 228 is provided between the cooling source (in the illustrated embodiment, the container 222) and a platform 230 suspended in the cryostat 220 for supporting the superconducting ring 210. The use of  
10 the platform 230 is desirable to ensure that the temperature of the superconducting element 210 is kept below the transition temperature, which in the case of a "high temperature" superconducting material (such as YBCO) is most preferably in the range of between 87-93 Kelvin. However, the use of the platform 230 is not critical to the invention or required as part of the  
15 special cryostat 220, since the thermal link 228 could extend directly to the superconducting element 210. The thermal link 228 may be a solid rod of material, including copper, brass, aluminum or any other material having a relatively high thermal conductivity. Instead of a solid rod, it is also possible to provide an open channel 232 in the thermal link 228, especially when a  
20 liquid cryogen C capable of flowing freely, such as nitrogen, is used as the cooling source 221. This channel 232 allows the cryogen C from the suspended container 224 to reach the platform 230 directly. Of course, the direct contact with the cryogen C may provide more efficient and effective cooling for the superconducting element 210.

The ring-shaped platform 230 that supports the superconducting element(s) 210 and supplies the desired cooling via thermal conduction may be made of copper, brass, aluminum, or another material having good thermal conductivity. It may be in the form of a solid ring, as illustrated, or may be  
5 in the form of a hollow ring (such as a substantially circular or elliptical torus, not shown). This would allow the liquid cryogen C to flow completely around the ring to further increase the efficiency with which the cooling is transferred to the superconducting element 210. In any case, where a platform 230 is used, care should be taken to ensure that full contact is made with at  
10 least a majority of the corresponding surface of the superconducting element 210 to ensure that the desired smooth, even, and reliable levitation is achieved.

To reduce the thermal transfer to the vessel 202 in the case where a temperature sensitive fluid is being pumped or mixed by the system  
15 200, a ring-shaped wall or enclosure 234 surrounding the platform 230 and the annular superconducting element 210 defines a first chamber 235. In addition, a hollow cylindrical wall or enclosure 236 may also surround the thermal link 232 and define a second chamber 237. Preferably, these first and second chambers 235, 237 are evacuated or insulated to minimize thermal  
20 transfer between the ambient environment and the cold elements held therein. In a preferred embodiment, each enclosure 234, 236 is fabricated from non-magnetic stainless steel, but the use of other materials is of course possible, as long as no interference is created with the levitation of the magnetic bearing 204. As with the second embodiment described above, it is also

possible to use the system 200 of the third embodiment to pump or mix cryogenic or non-temperature sensitive fluids, in which case there is no need to evacuate or insulate the enclosures 234, 236, or to even use the special cryostat 220 described herein.

5           As should be appreciated, it is possible to create the chambers 235, 237 defined by the enclosures 234, 236 and the chamber 223 such that all three are in fluid communication and thus represent one integrated vacuum space (not shown). This facilitates set-up, since all three chambers 223, 235, 237 may be evacuated in a single operation, such as by using a vacuum source  
10       coupled to a single valve (not shown) provided in one of the chambers. However, separately evacuating each chamber 223, 235, 237 is of course entirely possible. Also, instead of evacuating the chambers 223, 235, 237, some or all may be instead filled with an insulating material (not shown).

          As should be appreciated, to rotate the magnetic bearing 204 in  
15       this embodiment, it is desirable to place the drive magnets 212a, 212b in close proximity to the bearing, but preferably on the same side of the vessel 202 as the superconducting element 210. Accordingly, the special cryostat 220, and more specifically, the wall or enclosure 234 defines a room-temperature cylindrical bore or opening 240 that allows for the introduction of the end of  
20       the shaft 214 carrying the driving magnets 212a, 212b, which are at room temperature. As a result of this arrangement, the shaft 214, which is part of the motive device, is concentric with the superconducting element 210. The shaft 214 is also positioned such that the driving magnets 212a, 212b align with the driven magnets 208a, 208b on the bearing 204 when the levitating



magnet 206 is aligned with the superconducting element 210. Thus, despite being positioned adjacent to and concentric with the superconducting element 210, the shaft 214 and driving magnets 212a, 212b remain at room temperature, as does the vessel 202, the fluid F, and the magnetic bearing 204.

5           An example of one possible embodiment of a centrifugal pumping head 250 for use with the system 200 of Figure 9 is shown in Figure 11. The head 250 includes a levitating bearing 252 that carries one or more optional blades or vanes V (which are upstanding in the side view of Figure 11), a fluid inlet 254 (which as should be appreciated can be in the center at  
10       one side of the pumping head 250 in view of the fact that the levitation and driving forces are both supplied from the same side of the vessel 202), a fluid outlet 256, driven magnets 258a, 258b, and a ring shaped levitation magnet 260.

          In yet another possible embodiment of the invention, as shown  
15       in the cross-sectional view of Figure 12, the system 300 includes a magnetic bearing 302 adapted for inline use, such as when the vessel is in the form of a hollow pipe 304. The bearing 302 includes first and second spaced levitating magnets 305a, 305b, one of which is preferably positioned at each end to ensure that stable levitation is achieved. The magnets 305a, 305b  
20       preferably correspond in shape to the vessel, which in the case of a pipe 304, means that the magnets are annular. The magnets 305a, 305b are carried on a shaft 306 forming a part of the bearing 302, which further includes a driven magnet 308. The driven magnet 308 may be comprised of a plurality of sub-magnets 308a . . . 308n having different polarities and arranged in an

annular configuration to correspond to the shape of the pipe 304 serving as the vessel in this embodiment (see Figure 12b). All three magnets 305a, 305b, and 308 may be embedded or attached to an inert matrix material M, such as plastic, that provides the connection with the shaft 306. The shaft 306 of the bearing 302 may also carry one or more blades B.

First and second cryostats 310a, 310b are also provided. As perhaps best understood with reference to the cross-sectional view of Figure 12a, the first "cryostat" 310a includes a superconducting element for levitating the bearing in the form of an annular superconducting element 312a. The superconducting element 312a is suspended in a chamber 314a defined by the cryostat 310a, which may be evacuated or insulated to prevent thermal transfer to the pipe 304 or the passing fluid F. The cryostat 310a may include an inner wall adjacent to the outer surface of the pipe 304 (not shown), but such a wall is not necessary in view of the thermal separation afforded by the evacuated or insulated space surrounding the superconducting element 312a. The superconducting element 312a may be coupled to annular support platform 316a, which in turn is thermally linked to one or more separate cooling sources 318. The connection is only shown schematically in Figure 12, but as should be appreciated from reviewing the foregoing disclosure, may include a rod that serves to thermally link a container holding a liquid cryogen or a closed cycle refrigerator to the superconducting element 312a. While not shown in detail, "cryostat" 310b may be identical to the cryostat 310a just described.

With reference now to Figures 12b and 12c, two different

motive devices for rotating the magnetic bearing 302 in the pipe 304 are disclosed. The first motive device includes a driving magnet assembly 320 that is rotatably supported on a bearing 322, such as a mechanical ball or roller bearing, carried on the outer surface of the pipe 304. The magnet assembly 320 includes a plurality of driving magnets 320a . . . 320n, also having different or alternating polarities. As with the driven magnets 308a . . . 308n, the driving magnets 320a . . . 320n are embedded or attached to an inert, non-magnetic matrix material M, such as plastic. An endless belt 324 also forming a part of the motive device frictionally engages both the driving magnet assembly 320 and a pulley W carried on the spindle or shaft of a motor (preferably a reversible, variable speed electric motor, as described above).

As should now be appreciated, the bearing 302 is caused to levitate in the pipe 304 as a result of the interaction of the levitation magnets 305a, 305b with the adjacent superconducting elements 310a, 310b, which may be thermally separated from the outer surface of the pipe 304 (or the adjacent inner wall of the cryostat 310a, 310b, if present). Upon then rotating the magnetic drive assembly 320, the bearing 302 is caused to rotate in the pipe 304 serving as the vessel to provide the desiring pumping or mixing action. Even if the fluid F is flowing past the magnetic bearing 302, it remains held in place in the desired position in the pipe 304 as a result of the pinning forces created by the superconducting elements 310a, 310b acting on the levitation magnets 305a, 305b.

The second version of a motive device is shown in the cross-

sectional view of Figure 12c, which is similar to the cross-section taken in Figure 12b. However, instead of a magnetic driving assembly 320, endless belt 324, and motor, rotary motion is imparted to the magnetic bearing 302 by creating an electrical field around the pipe 304. This may be done by placing  
 5 a winding 326 around the outer wall of the pipe 304 and supplying it with an electrical current, such as from a power supply 328 or other source of AC current. Since the bearing 302 carries magnets 308a . . . 308n having different polarities, the resulting electric field will thus cause it to rotate.

Yet another embodiment of an inline pumping or mixing system  
 10 400 is shown in Figure 13. The cryostat 402 in this case is essentially positioned directly in the path of fluid flow along the pipe 403, thus creating an annular (or possibly upper and lower) flow channels 404a, 404b. The cryostat 402 has an outer wall 406 that defines a chamber 408 for containing a superconducting element 410. The superconducting element 410 may be  
 15 annular in shape, in which case the chamber 408 is of a similar shape. The chamber 408 may also be evacuated or insulated to thermally separate the superconducting element 410 from the outer wall 406. The superconducting element 410 is thermally linked to a separate cooling source 412, with both the thermal link and the cooling source being shown schematically in Figure  
 20 13. It should be appreciated that this cryostat 402 is similar in many respects to the one described above in discussing the third embodiment illustrated in Figure 9, which employs a similar, but somewhat reoriented, arrangement.

The wall 406 creating annular chamber 408 for the superconducting element 410 defines a room temperature bore or opening 414

into which a portion of a motive device may be inserted, such as the end of a shaft 416 carrying at least two driving magnets. Figure 13 illustrates the motive device with three such driving magnets 418a, 418b, 418c, one of which is aligned with the rotational axis of the shaft 416. The opposite end  
 5 of the shaft 416 is coupled to a motor (not numbered), which rotates the shaft and, hence, the driving magnets 418a, 418b, and 418c. The magnets 418a, 418b, 418c may be coupled directly to the shaft 416, or embedded/attached to an inert matrix material M.

The magnetic bearing 420 is positioned in the pipe 403 adjacent  
 10 to the outer wall 406 of the cryostat 402. The bearing 420 includes a levitation magnet 422 that corresponds in size and shape to the superconducting element 410, as well as driven magnets 424a, 424b, 424c that correspond to the driving magnets 418a, 418b, and 418c. The levitation magnet 422 and driven magnets 424a-424c are attached to or embedded in a  
 15 matrix material M, which may also support one or more blades B that provide the desired pumping or mixing action.

In operation, the motor rotates the shaft 416 to transmit rotary motion to the driving magnets 418a, 418b and 418c. As a result of the magnetic coupling formed between these magnets 418a-c and the opposite  
 20 polarity driven magnets 424a-c, the bearing 420 is caused to rotate in the fluid F. At the same time, the bearing 420 remains magnetically suspended in the fluid F as the result of the pinning forces created between the superconducting element 410 and the levitation magnet 422. The operation is substantially the same as that described above with regard to the third embodiment, and thus

will not be explained further here.

Various optional modifications may in some circumstances enhance the set-up or performance of any of the systems described above, or instead adapt them for a particular use, purpose, or application. As noted  
5 previously, the disposable vessel or container for holding the fluid undergoing pumping or mixing may be in the form of a flexible bag. An example of such a bag 500 is shown in Figure 14, along with the system 100 for levitating the bearing 502 of Figure 5. The bag 500 may be sealed with the fluid F and  
10 bearing 502 (which may take the form of one of the several bearings disclosed above or an equivalent thereof) inside prior to distribution for use, or may be provided with a sealable (or resealable) opening that allows for the fluid and bearing to be introduced and later retrieved.

Both the bearing and bag 500, whether permanently sealed or resealable, may be fabricated of inexpensive, disposable materials, such as  
15 plastics. Accordingly, both can simply be discarded after the pumping or mixing operation is completed and the fluid F is retrieved. It should also be appreciated that the vertical dimension of the bag 500 is defined by the volume of fluid F held therein. Thus, instead of placing the bag 500 containing the bearing 502 directly on the surface of the cryostat, table T, or  
20 other support structure adjacent to the superconducting element 106, it is possible to place the flexible bag 500 in a separate rigid or semi-rigid container (not shown). This helps to ensure that the fluid F provides the bag 500 with a sufficient vertical dimension to permit the bearing to freely rotate in a non-contact fashion. Alternatively, the bag 502 may include internal or

external reinforcements (not shown) to enhance its rigidity without interfering with the rotation of the magnetic bearing.

In cases where the bearing 502 is prepackaged in the bag 500, with or without fluid, it may inadvertently couple to adjacent magnets or other metallic structures. Breaking this coupling may render the bag susceptible to puncturing, tearing, or other forms of damage. Accordingly, as shown in Figure 14a, it may be desirable to place an attachment 520, cover, or similar device including a coupler 522 formed of a ferromagnetic material or the like adjacent to the bag 500, especially in cases where it is sealed with the bearing 502 inside during manufacturing. This coupler 522 is thus attracted to and forms a magnetic coupling with the magnetic bearing 502 when the attachment 520 is in place. As a result of this coupling, the magnetic bearing 502 is prevented from coupling with magnets in adjacent bags or other magnetic structures (not shown). The attachment 520 should be fabricated of a non-magnetic material, such as rubber. The coupler 522 will shield the magnetic field created by the bearing 502. When the assembly including the bag 500 and the bearing 502 is ready for use, the attachment 520 may simply be removed from the bag 500 to break the magnetic coupling between the bearing 502 and the coupler 522.

In all of the above-described embodiments, the pumping or mixing action is essentially localized in nature. This may be undesirable in some situations, such as where the vessel is relatively large compared to the magnetic bearing. To solve this problem, the particular system used to supply the pumping or mixing action may be provided with a motive device for

physically moving the superconducting element (which may also be simultaneously rotated), which will cause the levitating magnetic bearing to follow a similar path.

With reference to the schematic view of Figure 14b, and by way of example only, the particular arrangement is shown in use on the system 100 of Figure 5, but with the bag 500 of Figure 14. In addition to a motive device 540 for rotating the first portion of the cryostat 102a (which may comprise the bearing(s) 120, endless belt 128, motor 131, shaft, and pulley) and a cooling source 541, the system 100 may include a second motive device 542. In one embodiment, this second motive device 542 (shown schematically in dashed line outline only in Figure 14b) is capable of moving the first portion of the cryostat 102a, and hence the superconducting element 106, to and fro in a linear fashion (see action arrows L in Figure 14b). Thus, in addition to levitating and rotating the bearing 502, the side-to-side motion allows it to move relative to the bag 500 or other vessel containing the fluid. This advantageously permits non-localized pumping or mixing action to be provided. The motive device 542 may include a support structure, such as a platform (not shown) for supporting all necessary components, such as the first portion of the cryostat 102a (or the entire cryostat, such as in the embodiment of Figure 9), the first motive device 540 for rotating one of the superconducting element 106 (or the magnetic bearing 502 such as in the embodiment of Figure 9), and the cooling source 541 (which may form part of the cryostat as shown in Figure 9, or may be a separate component altogether, as shown in Figure 2). Instead of using a linear motion device, it



should also be appreciated that the second motive device 542 may be capable of moving the superconducting element in a circular or elliptical pattern relative to the fixed position of the bag 500 or other vessel, or in any other direction that will enhance the overall mixing or pumping action provided by the rotating magnetic bearing 502. Also, the bag 502 or vessel may be separately rotated or moved to further enhance the operation (see the above-description of the embodiment of Figure 3).

Ensuring that the magnetic bearings used in each system are both proper for that particular system and are sized properly may also be important. To do so, it is possible to provide a transmitter in one of the magnetic bearing or the vessel for generating a signal that is received by a receiver in the system (or vice versa), such as one positioned adjacent to the superconducting element or elsewhere. An example of one possible configuration is shown in Figure 14, wherein the transmitter 550 is provided on the bearing 502 itself and the receiver 560 is positioned in the cryostat 102 (but see Figure 14a, wherein the transmitter 550 or receiver 560 is provided in the bag serving as the vessel). A controller for the system, such as a computer (not shown) or other logic device, can then be used to maintain the system for rotating the bearing 502 in a non-operational, or "lock-out," condition until the receiver and transmitter 550, 560 correspond to each other (that is, until the transmitter 550 generates an appropriate signal that is received by the receiver 560). The transmitter/receiver combination employed may be of any type well known in the art, including electromagnetic, ultrasound, optical, or any other wireless or remote signal

transmitting and receiving devices.

In accordance with another aspect of the invention, a kit is also provided to assist in the set-up of any of the systems previously described. Specifically, and as briefly noted in both this and my prior pending application, it is necessary during field cooling to cool the superconducting element to below its transition temperature in the presence of a magnetic field in order to induce levitation in a permanent magnet producing the same magnetic field. This cooling process causes the superconducting element to “remember” the field, and thus induce the desired levitation in the bearing each time it or an additional magnet is placed over the superconducting element. While it is possible to use the magnetic bearing itself to produce the magnetic field during field cooling, oftentimes the bearing will be sealed in the vessel or container. This makes it difficult, if not impossible, to ensure that the magnet is properly aligned and spaced from the superconducting element during cooling.

To overcome this potential problem, the set-up kit of the present invention as illustrated in Figure 15 comprises a charging magnet 600 having a size, shape, and magnetic field distribution that is identical to the levitation magnet contained in the particular bearing slated for use in one of the pumping or mixing systems previously described. The charging magnet 600 is placed adjacent to the superconducting element 602, such as on the upper surface of the cryostat 604, table (not shown), or other chamber. As illustrated, the charging magnet 600 may further include a spacer 606. This spacer 606 allows the charging magnet 600 to simulate the spacing of the

magnetic bearing (not shown) above the superconducting element 602 during field cooling. This ensures that the desired levitation height is achieved for the magnetic bearing (not shown) once the vessel is in position. The spacer 606 is formed of a non-magnetic material to avoid interfering with the charging process. By providing a variety of different sizes, shapes, and configurations of charging magnets in the kit (e.g., annular magnets), it is possible to easily perform field cooling for any corresponding size or shape of levitation magnet in the corresponding magnetic bearing, and then simply place the vessel containing the bearing over the superconducting element 602 to induce the desired stable, reliable levitation.

During field cooling, and regardless of whether the magnetic bearing or a separate charging magnet 600 is used to produce the charging magnetic field, it is possible to induce an undesired magnetic state in the superconducting element 602, such as if the position of the bearing (not shown) or charging magnet 600 is not correct. Since improper charging may prevent the magnetic bearing from levitating in a stable fashion, recharging the superconducting element 602 may be required. To facilitate recharging the superconducting element, it is provided with a heater H, such as an electric heating coil (not shown). By energizing this coil using a power supply P or other source of electrical current (not shown), the superconducting element 602 may be quickly brought up from the transition temperature for recharging. As shown schematically, the power supply P is preferably positioned externally to the cryostat 604. Once the position of the bearing or charging magnet 600 is adjusted or corrected, the heater H may be turned off

and the superconducting element once again allowed to cool to the transition temperature in the presence of the desired magnetic field.

In summary, a number of systems 10, 100, 200, 300, as well as variations on these systems and related methods, are disclosed that use or  
5 facilitate the use of superconducting technology to levitate a bearing that, when rotated, serves to pump or mix a fluid. In one system 10, the magnetic bearing 14 is placed in a fluid vessel 16 positioned external to a cryostat 12 having an outer wall or other housing 18 for containing a superconducting element 20. A separate cooling source 24 (either a cryogenic chamber 26,  
10 Figures 1 and 3 or a refrigerator 48, Figure 2) thermally linked to the superconducting element 20 provides the necessary cooling to create the desired superconductive effects and induce levitation in the magnetic bearing 14. Since the bearing levitates in the fluid F, no penetration of the vessel walls by mixing or stirring rods is necessary, which eliminates the need for  
15 dynamic bearings or seals.

Additionally, the outer wall 18 of the cryostat 12 or other housing defines a chamber 25 that thermally isolates and separates the superconducting element 20 from the vessel 16 containing the fluid F and magnetic bearing 14. The thermal isolation may be provided by evacuating  
20 the chamber 25, or filling it with an insulating material. By virtue of this thermal isolation and separation, the superconducting element 20 can be positioned in close proximity to the outer wall or housing 18 adjacent to the vessel 16 and magnetic bearing 14, thereby achieving a significant reduction in the separation distance or gap G between the magnetic bearing 14 and the

superconducting element 20. This enhances the magnetic stiffness and loading capacity of the magnetic levitating bearing 14, thus making it suitable for use with viscous fluids or relatively large volumes of fluid.

5 The exceptionally stable levitation provided as a result of the reduced separation distance also significantly reduces the potential for contact between the rotating bearing and the bottom or sidewalls of the vessel. This makes this arrangement particularly well-suited for use in fluids that are sensitive to shear stress or the effects of frictional heating. However, since the superconducting element 20 is substantially thermally isolated and  
10 separated from the vessel 16, the magnetic bearing 14, and hence the fluid F contained therein, may be shielded from the cold temperatures generated by the cooling source 24 to produce the desired superconductive effects and the resultant levitation. This allows for temperature sensitive fluids to be mixed or pumped. By using means external to the vessel 16 to rotate and/or stabilize  
15 the magnetic bearing 14 levitating in the fluid F, such as one or more rotating driving magnets coupled to the magnetic bearing 14, the desired pumping or mixing action is provided.

Additional embodiments of systems 100, 200 for pumping or mixing a fluid wherein the necessary motive force is provided from the same  
20 side of the vessel at which the superconducting element is positioned are also disclosed, as are systems 300, 400 for rotating an inline magnetic bearing positioned in a vessel in the form of a pipe or the like.

The foregoing description of various embodiments of the present invention have been presented for purposes of illustration and

description. The description is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Obvious modifications or variations are possible in light of the above teachings. The embodiments described provide the best illustration of the principles of the invention and its practical applications to thereby enable one of ordinary skill in the art to utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. All such modifications and variations are within the scope of the invention as determined by the appended claims when interpreted in accordance with the breadth to which they are fairly, legally and equitably entitled.

**In the Claims**

1. A system for pumping or mixing a fluid in a vessel, comprising:  
5 a magnetic bearing for placement in the vessel;  
at least one superconducting element for levitating said magnetic bearing;  
a wall defining a chamber around the superconducting element, said chamber thermally isolating the superconducting element from the  
10 vessel;  
a separate cooling source thermally linked to said superconducting element;  
a motive device for rotating said magnetic bearing or said superconducting element.
2. The system for pumping or mixing a fluid according to claim 1, wherein the chamber is evacuated or insulated to minimize thermal transfer from said superconducting element to said wall and provide the desired thermal isolation.
3. The system for pumping or mixing a fluid according to claim 1, wherein said wall is the outer wall of a cryostat and said cooling source is a chamber in said cryostat holding a liquid cryogen.

4. The system for pumping or mixing a fluid according to claim 1, wherein said cooling source is a refrigerator.

5. The system for pumping or mixing a fluid according to claim 1, wherein said thermal linking is provided by a rod extending between said superconducting element and said cooling source.

6. The system for pumping or mixing a fluid according to claim 1, wherein said levitating magnetic bearing further includes a first permanent magnet positioned adjacent to said superconducting element but external to said wall.

7. The system for pumping or mixing a fluid according to claim 6, wherein said magnetic bearing further includes a second permanent magnet spaced from said first permanent magnet for forming a magnetic coupling with a drive magnet forming a part of said motive device, whereby said  
5 magnetic coupling serves to transmit driving torque from said drive magnet to said magnetic bearing.

8. The system for pumping or mixing a fluid according to claim 7, wherein said motive device for said magnetic bearing includes a motor for rotating said drive magnet.

9. The system for pumping or mixing a fluid according to claim



8, wherein said second permanent magnet includes at least two submagnets that correspond to opposite polarity submagnets forming a part of said drive magnet, whereby said cooperating submagnets serve to stabilize said magnetic bearing during rotation.

10. The system for pumping or mixing a fluid according to claim 1, wherein said wall is below said magnetic bearing and the vessel rests atop said wall.

11. The system for pumping or mixing a fluid according to claim 1, wherein a gap is provided between said superconducting element and an inner surface of said wall of approximately 0.01 to 5 millimeters.

12. The system for pumping or mixing a fluid according to claim 1, wherein the vessel includes an inlet and an outlet and said rotating magnetic bearing includes at least one blade for creating a pumping action that forces fluid to move from said inlet to said outlet.

13. The system for pumping or mixing a fluid according to claim 1, wherein said vessel is completely sealed and said magnetic bearing serves to mix the fluid only.

14. The system for pumping or mixing a fluid according to claim 1, wherein the vertical center axis of rotation of the magnetic bearing is offset

from the vertical center axis of the vessel.

15. The system according to claim 1, wherein the vessel is selected from the group consisting of an open-top container, a sealed container, a disposable container, a rigid container, a container having an inlet and an outlet, a hollow pipe and a flexible bag.

16. The system for pumping or mixing a fluid according to claim 1, wherein said superconducting element is supported by the wall defining said chamber, and wherein said chamber is in turn supported from a stable mounting structure by a bearing permitting rotational motion, said motive device rotating said wall and said superconducting element together.

17. The system for pumping or mixing a fluid according to claim 16, wherein the cooling source is a stationary container holding a cryogen, and the support for the superconducting element is provided by a thermal link rigidly connected to the wall and providing a dynamic thermal connection with the cooling source.

18. The system for pumping or mixing a fluid according to claim 16, wherein said motive device is a motor coupled to said wall by an endless belt, wherein said endless belt transfers the rotary motion produced by said motor to said wall to cause said superconducting element to rotate.

19. The system for pumping or mixing a fluid according to claim 16, wherein said cooling source is coupled to and rotates with said wall.

20. The system for pumping or mixing a fluid according to claim 16, wherein the vessel is a centrifugal pumping head having an inlet substantially at the center of a vessel wall opposite the side of the pumping head positioned adjacent to said superconducting element.

21. The system for pumping or mixing a fluid according to claim 16, wherein said chamber housing said superconducting element is positioned below said magnetic bearing in said vessel.

22. The system for pumping or mixing a fluid according to claim 16, wherein the vessel is supported by a stable support structure positioned between said superconducting element and said magnetic bearing.

23. The system for pumping or mixing a fluid according to claim 16, wherein the magnetic bearing includes first and second magnets having different polarities to create a non-symmetrical magnetic field with respect to an axis of rotation of said superconducting element.

24. The system for pumping or mixing a fluid according to claim 16, wherein the magnetic bearing includes at least one low-profile rod carrying first and second magnets, wherein said rod is capable of being

inserted in a relatively narrow opening in the vessel.

25. The system for pumping or mixing a fluid according to claim 16, wherein the magnetic bearing includes a pair of interconnected rods that are substantially orthogonal to each other in a nominal position with each rod carrying first and second magnets having the same polarities.

26. The system for pumping or mixing a fluid according to claim 25, wherein the rods are pinned together and are thus capable of rotating about a common center, wherein the rods can be rotated to a partially folded position for insertion through a narrow opening in a container.

27. The system for pumping or mixing a fluid according to claim 25, wherein at least one of the rods is formed of a flexible material and is thus capable of being deformed during insertion in the relatively narrow opening in the vessel.

28. The system for pumping or mixing a fluid according to claim 1, wherein said motive device is positioned adjacent to and on the same side of the vessel as the superconducting element.

29. The system for pumping or mixing a fluid according to claim 28, wherein said superconducting element is annular and at least a portion of said motive device for rotating said levitating magnetic bearing is concentric

with and adjacent to the annular superconducting element.

30. The system for pumping or mixing a fluid according to claim 29, wherein a portion of the chamber defined by said wall is annular for receiving said annular superconducting element.

31. The system for pumping or mixing a fluid according to claim 30, wherein said motive device includes a shaft carrying at least first and second driving magnets at one end, said driving magnets being inserted in a thermally separated or isolated bore formed by said wall concentric with the annular chamber for housing said superconducting element.

32. The system for pumping or mixing a fluid according to claim 28, further including a platform in said chamber for supporting the superconducting element, wherein the platform is thermally linked to the separate cooling source.

33. The system for pumping or mixing a fluid according to claim 32, wherein the thermal linking is provided by a rod extending from the cooling source to the platform for supporting the superconducting element.

34. The system for pumping or mixing a fluid according to claim 32, wherein the chamber housing the superconducting element is evacuated and also houses a thermal link between the cooling source and the platform.

35. The system for pumping or mixing a fluid according to claim 28, wherein said motive device includes a shaft carrying at least first and second driving magnets.

36. The system for pumping or mixing a fluid according to claim 35, wherein said magnetic bearing comprises:

a levitation magnet substantially corresponding in size and shape to the superconducting element;

5 at least two driven magnets having opposite polarities, said driven magnets being aligned with said first and second driving magnets rotated by said motive device,

whereby said levitation magnet levitates said bearing while said driven magnets transmit rotary motion from said driving magnets to said  
10 magnetic bearing.

37. The system for pumping or mixing a fluid according to claim 28, wherein the cooling source is a container of a liquid cryogen or a closed-cycle refrigerator.

38. The system for pumping or mixing a fluid according to claim 37, wherein the cooling source is the liquid cryogen container and the chamber housing the superconducting element is evacuated and also houses the cooling source.

39. The system for pumping or mixing a fluid according to claim 1, further including a transmitter for transmitting a signal or receiver for receiving the signal, and wherein either said magnetic bearing or the vessel includes one of the transmitter or the receiver and the other is positioned adjacent to said superconducting element, wherein the operation of said motive device is restricted until the signal generated by the transmitter is received by said receiver.

40. The system for pumping or mixing a fluid according to claim 28, wherein the vessel is a centrifugal pumping head having an inlet substantially at the center of a vessel wall opposite the side of the pumping head positioned adjacent to said superconducting element.

41. The system for pumping or mixing a fluid according to claim 28, wherein the vessel is a pipe, the wall defining the chamber for thermally isolating the superconducting element is positioned inside of the pipe and includes a thermally separated or isolated bore for receiving a driven shaft carrying a plurality of alternating polarity driving magnets forming a part of said motive device, said driving magnets magnetically coupling with a plurality of corresponding driven magnets in or on said magnetic bearing.

42. The system for pumping or mixing a fluid according to claim 1, wherein the vessel is a pipe, the superconducting element includes at least two superconducting members each thermally separated or isolated from the

5 outer surface of the pipe, and said bearing includes at least two levitation magnets, each corresponding to one of said at least two superconducting members, whereby said magnetic bearing is levitated in said pipe as a result of the interaction between each said superconducting members and the corresponding levitation magnet.

43. The system for pumping or mixing a fluid according to claim 42, wherein said magnetic bearing further includes a plurality of alternating polarity driven magnets.

44. The system for pumping or mixing a fluid according to claim 43, wherein the motive device includes a bearing positioned outside of said pipe for rotatably supporting a driving magnet assembly carrying a plurality of alternating polarity driving magnets, a motor, and an endless belt for  
5 transmitting rotary motion from said motor to said driving magnet assembly, wherein the driving magnet assembly upon rotating creates a varying magnetic field that influences said driven magnets and causes said magnetic bearing to rotate.

45. The system for pumping or mixing a fluid according to claim 43, wherein the motive device includes a winding positioned external to said pipe and a power supply for supplying an electrical current to said winding, wherein said winding creates an electrical field that causes said levitating  
5 magnetic bearing to rotate in said pipe.



46. The system for pumping or mixing a fluid according to claim 1, wherein said bearing includes at least one levitation-assist chamber for holding a substance that is lighter than the fluid in said vessel, whereby the chamber assists in levitating the magnetic bearing in the fluid.

47. The system for pumping or mixing a fluid according to claim 1, wherein the motive device is a first motive device, and further including a second motive device for moving the superconducting element relative to the vessel, whereby effective, non-localized pumping or mixing action may be provided by the magnetic bearing as a result.

48. The system for pumping or mixing a fluid according to claim 47, wherein the second motive device is a linear motion device.

49. The system for pumping or mixing a fluid according to claim 47, wherein:

said superconducting element is supported by the wall defining said chamber, and wherein said chamber is in turn supported from a stable mounting structure by a bearing permitting rotational motion, said motive device rotating said wall and said superconducting element together;

said first motive device is a motor coupled to said wall by an endless belt, wherein said endless belt transfers the rotary motion produced by said motor to said wall to cause said superconducting element to rotate;

and

wherein the second motive device includes a support structure for supporting the wall, the stable mounting structure, and the motor and a linear motion device for moving the support structure to and fro relative to the vessel.

50. A system for mixing a fluid, comprising:

a vessel for holding the fluid;

a magnetic bearing for positioning in said vessel;

a superconducting element;

5 a housing defining a chamber around said superconducting element for thermally isolating said superconducting element from said vessel;

a cooling source thermally linked to said superconducting element; and

10 a motive device for rotating said magnetic bearing or said superconducting element.

51. The mixing system according to claim 50, wherein said chamber surrounding said superconducting element is evacuated to minimize thermal transfer to said housing and provide the desired thermal isolation.

52. The mixing system according to claim 50, wherein said vessel includes an inlet and an outlet and said magnetic bearing further includes at

least one blade or vane for creating a pumping action that forces fluid to move from said inlet to said outlet.

53. The mixing system according to claim 50, wherein said vessel is completely sealed from the outside environment.

54. The mixing system according to claim 50, wherein said vessel and magnetic bearing are disposable.

55. A system for pumping or mixing a fluid in a vessel positioned on a stable support structure, comprising:

a magnetic bearing for placement in the vessel;

5 at least one superconducting element for levitating said magnetic bearing;

a cooling source thermally linked to said superconducting element in said chamber;

a motive device for rotating said superconducting element.

56. The system for pumping or mixing a fluid according to claim 55, further including a wall defining a chamber for thermally isolating the superconducting element, and wherein said wall and chamber are rotated along with the superconducting element.

57. The system for pumping or mixing a fluid according to claim

56, wherein a thermal link to said cooling source extends at least partially through said chamber and directly supports the superconducting element, said wall defining said chamber is supported by a bearing permitting rotational motion, said motive device is a motor coupled to said chamber by an endless belt, and said endless belt transfers the rotary motion produced by said motor to said wall and said thermal link to rotate the superconducting element.

58. The system for pumping or mixing a fluid according to claim 56, wherein said cooling source contains a liquid cryogen and is attached to and rotates with said wall and chamber.

59. The system for pumping or mixing a fluid according to claim 56, wherein said chamber housing said superconducting element is positioned below said magnetic bearing in said vessel.

60. The system for pumping or mixing a fluid according to claim 55, wherein said magnetic bearing includes at least one blade or vane, whereby said blade or vane provides the desired pumping or mixing action when the bearing is rotated.

61. The system for pumping or mixing a fluid according to claim 55, wherein said vessel is a centrifugal pumping head having an inlet and an outlet, wherein the rotation of said magnetic bearing causes the fluid to move

from the inlet to the outlet.

62. The system for pumping or mixing a fluid according to claim 61, wherein the inlet is in a vessel wall of the pumping head opposite a side of the pumping head adjacent to the superconducting element.

63. The system for pumping or mixing a fluid according to claim 55, wherein the vessel is supported by a stable support structure positioned between said superconducting element and said magnetic bearing.

64. The system for pumping or mixing a fluid according to claim 55, wherein the magnetic bearing includes first and second magnets having different polarities to create a non-symmetrical magnetic field with respect to an axis of rotation of said superconducting element.

65. The system for pumping or mixing a fluid according to claim 55, wherein the vessel is selected from the group consisting of an open-top container, a sealed container, a container having an inlet and an outlet, a disposable container, a rigid container, a pipe, and a flexible bag.

66. The system for pumping or mixing a fluid according to claim 55, wherein the magnetic bearing includes at least one low-profile rod carrying first and second magnets having the different polarities, said rod being capable of insertion in a relatively narrow opening in the vessel.

67. The system for pumping or mixing a fluid according to claim 55, wherein the magnetic bearing includes a pair of interconnected rods that are substantially orthogonal to each other in a nominal position, each carrying first and second magnets having the same polarity.

68. The system for pumping or mixing a fluid according to claim 67, wherein the rods are pinned together and are thus capable of rotating about a common center, wherein the rods can be rotated to a partially folded position for insertion through a narrow opening in a container.

69. The system for pumping or mixing a fluid according to claim 67, wherein at least one of the rods is formed of a flexible material and is thus capable of deforming for insertion in the relatively narrow opening in the vessel.

70. A system for pumping or mixing a fluid in a vessel, comprising:  
 a magnetic bearing for placement in the vessel;  
 a superconducting element for levitating said magnetic bearing;  
 a wall defining a chamber around the superconducting element,  
 5 said chamber thermally isolating the superconducting element from the vessel;  
 a separate cooling source thermally linked to said superconducting element;  
 a motive device for rotating said magnetic bearing, wherein at

- 10    least a portion of said motive device is positioned adjacent to and concentric with the superconducting element.

71.    The system for pumping or mixing a fluid according to claim 70, wherein said superconducting element is annular and at least a portion of said motive device is position in a center opening of the annular superconducting element.

72.    The system for pumping or mixing a fluid according to claim 71, wherein a portion of the chamber defined by said wall is annular for receiving said annular superconducting element.

73.    The system for pumping or mixing a fluid according to claim 72, further including a platform in said chamber for supporting the superconducting element, wherein the platform is thermally linked to the separate cooling source.

74.    The system for pumping or mixing a fluid according to claim 73, wherein the chamber housing the superconducting element is evacuated and also houses a thermal link from the cooling source to the platform supporting the superconducting element.

75.    The system for pumping or mixing a fluid according to claim 70, wherein the cooling source is a container of a liquid cryogen or a closed-cycle

refrigerator.

76. The system for pumping or mixing a fluid according to claim 75, wherein the cooling source is a liquid cryogen container and the chamber housing the superconducting element is evacuated and also houses the cooling source.

77. The system for pumping or mixing a fluid according to claim 70, wherein said motive device includes a shaft carrying a plurality of alternating polarity driving magnets corresponding to a plurality of driven magnets on said magnetic bearing, said driving magnets being received in a thermally  
5 separated or isolated bore formed by the wall defining the chamber around said superconducting element.

78. The system for pumping or mixing a fluid according to claim 77, wherein said magnetic bearing comprises:

a levitation magnet corresponding in size and shape to the superconducting element;

5 at least two driven magnets having opposite polarities, said driven magnets being aligned with the corresponding driving magnets of said motive device,

whereby said levitation magnet levitates said bearing while said driven magnets transmit rotary motion to said bearing from said driving  
10 magnets.



79. The system for pumping or mixing a fluid according to claim 78, wherein said levitation magnet is annular.

80. The system for pumping or mixing a fluid according to claim 70, wherein said magnetic bearing carries at least one blade or vane.

81. The system for pumping or mixing a fluid according to claim 70, wherein said chamber is evacuated or filled with an insulating material.

82. The system for pumping or mixing a fluid according to claim 70, wherein the vessel is a pipe, the wall defining the chamber thermally isolating the superconducting element is positioned inside of said pipe and includes a thermally separated or isolated bore for receiving a driven shaft carrying a plurality of alternating polarity driving magnets forming a part of said motive device and magnetically coupling with a plurality of corresponding driven magnets in or on said magnetic bearing.

83. A system for pumping or mixing a fluid in a vessel, comprising:  
a magnetic bearing for placement in the vessel;  
at least one superconducting element for levitating said magnetic bearing;

a wall defining a chamber around the superconducting element, said chamber thermally isolating the superconducting element from the vessel;

a separate cooling source thermally linked to said superconducting element;

10 a first motive device for rotating said magnetic bearing or said superconducting element;

a second motive device for moving the superconducting element relative to the vessel,

15 whereby moving the superconducting element ensures that effective, non-localized pumping or mixing action is afforded by the levitating, rotating bearing.

84. The system for pumping or mixing a fluid according to claim 83, wherein the second motive device is a linear motion device for moving the superconducting element to and fro.

85. The system for pumping or mixing a fluid according to claim 83, wherein:

5 said superconducting element is supported by the wall defining said chamber, and wherein said chamber is in turn supported from a stable mounting structure by a bearing permitting rotational motion, said motive device rotating said wall and said superconducting element together;

said first motive device is a motor coupled to said wall by an endless belt, wherein said endless belt transfers the rotary motion produced by said motor to said wall to cause said superconducting element to rotate; and  
10 wherein the second motive device includes a support structure

for supporting the wall, the stable mounting structure, and the motor, and a linear motion device for moving the support structure to and fro relative to the vessel.

86. An assembly for use in containing a fluid undergoing a pumping or mixing operation, comprising:

a vessel formed of a flexible disposable material capable of holding the fluid; and

5 a levitating magnetic bearing positioned in said vessel,  
whereby said magnetic bearing is levitated in the vessel and can be disposed of along with said vessel when said pumping or mixing operation is complete.

87. The assembly according to claim 86, wherein the vessel is selected from the group consisting of an open-top container, a pipe, a container having an inlet and an outlet, a sealed container, and a bag.

88. The assembly according to claim 86, further including a rigid or semi-rigid support container for receiving and providing support for said flexible vessel.

89. The assembly according to claim 86, further including an attachment for placement over the flexible container carrying a coupler for coupling with the magnetic bearing prior to use.

90. A system for pumping or mixing a fluid, comprising:
- a vessel capable of holding the fluid;
  - a levitating magnetic bearing positioned in the vessel, said bearing capable of being rotated in a non-contact fashion to create the pumping or mixing action;
  - a controller for controlling the rotation of said magnetic bearing;
  - a transmitter for generating a signal; and
  - a receiver for receiving the signal generated by the transmitter;
- wherein one of said vessel or said bearing carries the transmitter for generating the signal or the receiver for receiving the signal generated by the transmitter, and wherein said controller prevents said bearing from rotating until an appropriate signal is received by the receiver.

91. A kit for assisting in the set-up of a fluid pumping or mixing system wherein a magnetic bearing including at least one levitation magnet is levitated in a vessel by a superconducting element in communication with a cooling source for cooling the superconducting element to a transition temperature during a field cooling process, comprising:
- at least one charging magnet substantially corresponding in size, shape, and magnetic field distribution to the at least one levitation magnet of the magnetic bearing, wherein the charging magnet is placed over the superconducting element during cooling to create a magnetic field, whereby the presence of the magnetic field during cooling serves to charge the superconducting element for levitating the magnetic bearing in the vessel.

92. The kit according to claim 91, further including a plurality of charging magnets, each corresponding in size, shape, and magnetic field distribution to the at least one levitation magnet in one of a plurality of magnetic bearings for use in the pumping or mixing system.

93. The kit according to claim 91, further including a spacer for spacing the charging magnet from the superconducting element at a predetermined level, wherein this spacing serves to define a levitation height of the magnetic bearing above the superconducting element during field cooling.

94. A system for pumping or mixing a fluid in a vessel, comprising:  
 a magnetic bearing for placement in the vessel;  
 at least one superconducting element for levitating said magnetic bearing;  
 a separate cooling source thermally linked to said superconducting element;  
 a motive device for rotating one of said magnetic bearing or said superconducting element,  
 wherein said bearing includes at least one levitation-assist chamber for holding a substance that is lighter than the fluid in said vessel, whereby the chamber assists in levitating the magnetic bearing in the fluid.

95. The system for pumping or mixing a fluid according to claim 94, wherein said substance is air.

96. The system for pumping or mixing a fluid according to claim 94, wherein said levitating magnetic bearing further includes a first permanent magnet positioned adjacent to said superconducting element and a second permanent magnet spaced from said first permanent magnet for forming a magnetic coupling with a drive magnet forming a part of said motive device, wherein a levitation-assist chamber is provided on each of said magnetic bearings.

97. The system for pumping or mixing a fluid according to claim 96, wherein a shaft is provided for coupling said first and second permanent magnets together, wherein a levitation-assist chamber is provided around at least a portion of said shaft.

98. A cryostat for keeping an annular superconducting element thermally isolated from the ambient environment, comprising:

an outer wall defining an annular chamber for housing the annular superconducting element, said annular chamber being evacuated or insulated to thermally isolate the superconducting element from the wall.

99. The cryostat according to claim 98, wherein the wall defining said annular chamber also defines a thermally separated and isolated bore,

whereby said bore has an upper wall for supporting a fluid containing vessel adjacent to said cryostat and an open end for receiving at least a portion of a  
5 motive device for rotating a magnetic bearing carried in the vessel.

100. The cryostat according to claim 98, further including a second evacuated or insulated chamber for housing a thermal link to the superconducting element from a cooling source.

101. The cryostat according to claim 99, further including a third chamber for housing the cooling source.

102. The cryostat according to claim 99, wherein the first, second, and third chambers are in fluid communication and may be evacuated by a single vacuum source.

103. A magnetic bearing for use in a pumping or mixing system having an annular superconducting element and a concentric motive device including a plurality of driving magnets, comprising:

an annular levitation magnet for positioning adjacent to and in  
5 substantial alignment with the annular superconducting element;

a plurality of permanent driven magnets positioned in the opening in said annular levitation magnet, whereby said driven magnets align and magnetically couple with the driving magnets of said motive device.

104. A magnetic bearing for levitating and rotating adjacent to a superconducting element to pump or mix a fluid held in a vessel having a relatively narrow opening, comprising:

5 at least one elongated rod carrying first and second levitation magnets, said rod having a length that exceeds a major dimension of the opening in the vessel,

wherein said rod is capable of being inserted in the relatively narrow opening in the vessel and moving to a position where the magnets are in substantial alignment with the superconducting element.

105. The bearing according to claim 104, wherein the rod is formed of a flexible material and is thus capable of being deformed during insertion in the relatively narrow opening in the vessel.

106. A magnetic bearing for levitating and rotating above a superconducting element to pump or mix a fluid held in a vessel having a relatively narrow opening, comprising:

5 a pair of interconnected, elongated rods positioned substantially orthogonal to each other in a nominal position, each carrying first and second levitation magnets having the same polarity, each said rod having a length that exceeds a major dimension of said opening;

10 wherein at least one of said rods is capable of being folded for passing through the relatively narrow opening in the vessel and moving to a position where the levitation magnets are in substantial alignment with the



superconducting element.

107. The bearing according to claim 106, wherein the rods are pinned together and are thus capable of rotating about a common center, wherein the rods can be rotated to a partially folded position about the pinned connection for passing through a narrow opening in a container.

108. The bearing according to claim 106, wherein the rods are rigidly coupled together and at least one of the rods is formed of a flexible material, whereby the flexible rod is capable of being deformed for passing through relatively narrow opening in the vessel.

109. A system for levitating a magnet, comprising:

at least one superconducting element;

a cooling source thermally linked to the superconducting element, said cooling source cooling the superconducting element to a transition temperature in the presence of a magnetic field to induce levitation in the magnet;

a heater for warming said superconducting element to above the transition temperature such that the superconducting element may again be cooled in the presence of the same or a different magnetic field to induce levitation in the same or a different magnet.

110. The system according to claim 109, wherein the heater is an

electric coil positioned adjacent to the superconducting element and in communication with a power supply.

111. A method of levitating and rotating a magnetic bearing for pumping or mixing a fluid, comprising:

placing the magnetic bearing in the vessel;

levitating the magnetic bearing above a superconducting element  
5 positioned in an evacuated or insulated chamber adjacent to the vessel and thermally linked to a separate cooling source; and

rotating the magnetic bearing in the vessel.

112. The method according to claim 111, further including the steps of placing said magnetic bearing in the vessel prior to filling the vessel with a fluid, and after mixing or pumping is completed, disposing of said magnetic bearing and vessel.

113. The method according to claim 112, including the step of completely sealing the vessel prior to rotating said magnetic bearing.

114. The method according to claim 111, wherein the magnetic bearing includes at least two magnets having different polarities to create a non-symmetrical magnetic field relative to an axis of rotation, and said step of rotating the magnetic bearing includes rotating the superconducting element  
5 to cause said magnetic bearing to rotate about said axis.

115. The method according to claim 111, wherein the vessel is a flexible bag for containing the fluid, and the method further includes placing the bearing in the flexible bag prior to filling the bag with the fluid.

116. A method of levitating and rotating a magnetic bearing for pumping or mixing a fluid, comprising:

5 placing a magnetic bearing carrying first and second magnets having different polarities to create a non-symmetrical magnetic field in a vessel;

levitating the magnetic bearing in the vessel using a superconducting element;

rotating the superconducting element to induce rotation in the bearing.

117. A method of levitating and rotating a magnetic bearing for pumping or mixing a fluid, comprising:

5 placing a magnetic bearing in the vessel;  
levitating the magnetic bearing in the vessel using a superconducting element;

rotating the magnetic bearing using a driving magnet positioned adjacent to and concentric with the superconducting element.

118. A method of charging a superconducting element for levitating

a magnetic bearing in a vessel, comprising the steps of:

placing a charging magnet corresponding to the magnetic bearing in size, shape, and magnetic field distribution adjacent to the superconducting element;

5                   cooling the superconducting element to below a transition temperature;

removing the charging magnet;

positioning the magnetic bearing in the vessel over the superconducting element.

119. The method according to claim 118, further including spacing the charging magnet a preselected distance from the superconducting element during cooling, whereby the preselected distance corresponds to the levitation height of the magnetic bearing.

120. The method according to claim 118, further including removing the magnetic bearing, warming the superconducting element to above the transition temperature, positioning a different charging magnet over the superconducting element, cooling the superconducting element to below the  
5 transition temperature, and positioning a different magnetic bearing corresponding in size, shape, and magnetic field distribution to the different charging magnet over the superconducting element.

121. A method of levitating and rotating a magnetic bearing in a fluid

containing vessel, comprising:

placing a magnetic bearing having at least one chamber containing a substance that is lighter than the fluid held in the vessel;

levitating the magnetic bearing above a superconducting element positioned in an evacuated or insulated chamber adjacent to the vessel and thermally linked to a separate cooling source; and

rotating the magnetic bearing in the vessel,

whereby the substance in the chamber assists in levitating the magnetic bearing in the fluid.

122. A method of ensuring that a levitating magnetic bearing for pumping or mixing a fluid corresponds to an adjacent pumping or mixing system, comprising:

providing a transmitter on or adjacent to one of the magnetic bearing or the pumping or mixing system for transmitting a signal;

providing a receiver on or adjacent to the opposite of the magnetic bearing or the pumping or mixing system for receiving the signal generated by the transmitter;

preventing the operation of the system until the signal is received by the receiver.

123. A method of levitating and rotating a magnetic bearing for pumping or mixing a fluid in a vessel, comprising:

placing the magnetic bearing in the vessel;

levitating the magnetic bearing above a superconducting element positioned in an evacuated or insulated chamber adjacent to the vessel and thermally linked to a separate cooling source;


rotating the magnetic bearing in the vessel;

- 5 moving the superconducting element relative to the vessel,  
whereby the rotating magnetic bearing follows the movement of the superconducting element to ensure that effective, non-localized pumping or mixing action is provided.


124. The method according to claim 123, wherein the step of rotating the magnetic bearing includes rotating the superconducting element, and wherein the step of moving the superconducting element includes moving the superconducting element to and fro relative to the vessel in a linear fashion.


## **Abstract**




A system for pumping or mixing a fluid using a levitating, rotating magnetic bearing and various other components for use in a pumping or mixing system are disclosed. The magnetic bearing is placed in a fluid-containing vessel in close proximity to a superconducting element. A separate cooling source thermally linked to the superconducting element provides the necessary cooling to induce levitation in the magnetic bearing. The superconducting element may be thermally isolated, such that the bearing, the vessel, and any fluid contained therein are not exposed to the cold temperatures required to produce the desired superconductive effects and the resulting levitation. By using means external to the vessel to rotate and/or stabilize the magnetic bearing levitating in the fluid, including possibly rotating the superconducting element itself or moving it relative to the vessel, the desired effective pumping or mixing action may be provided.

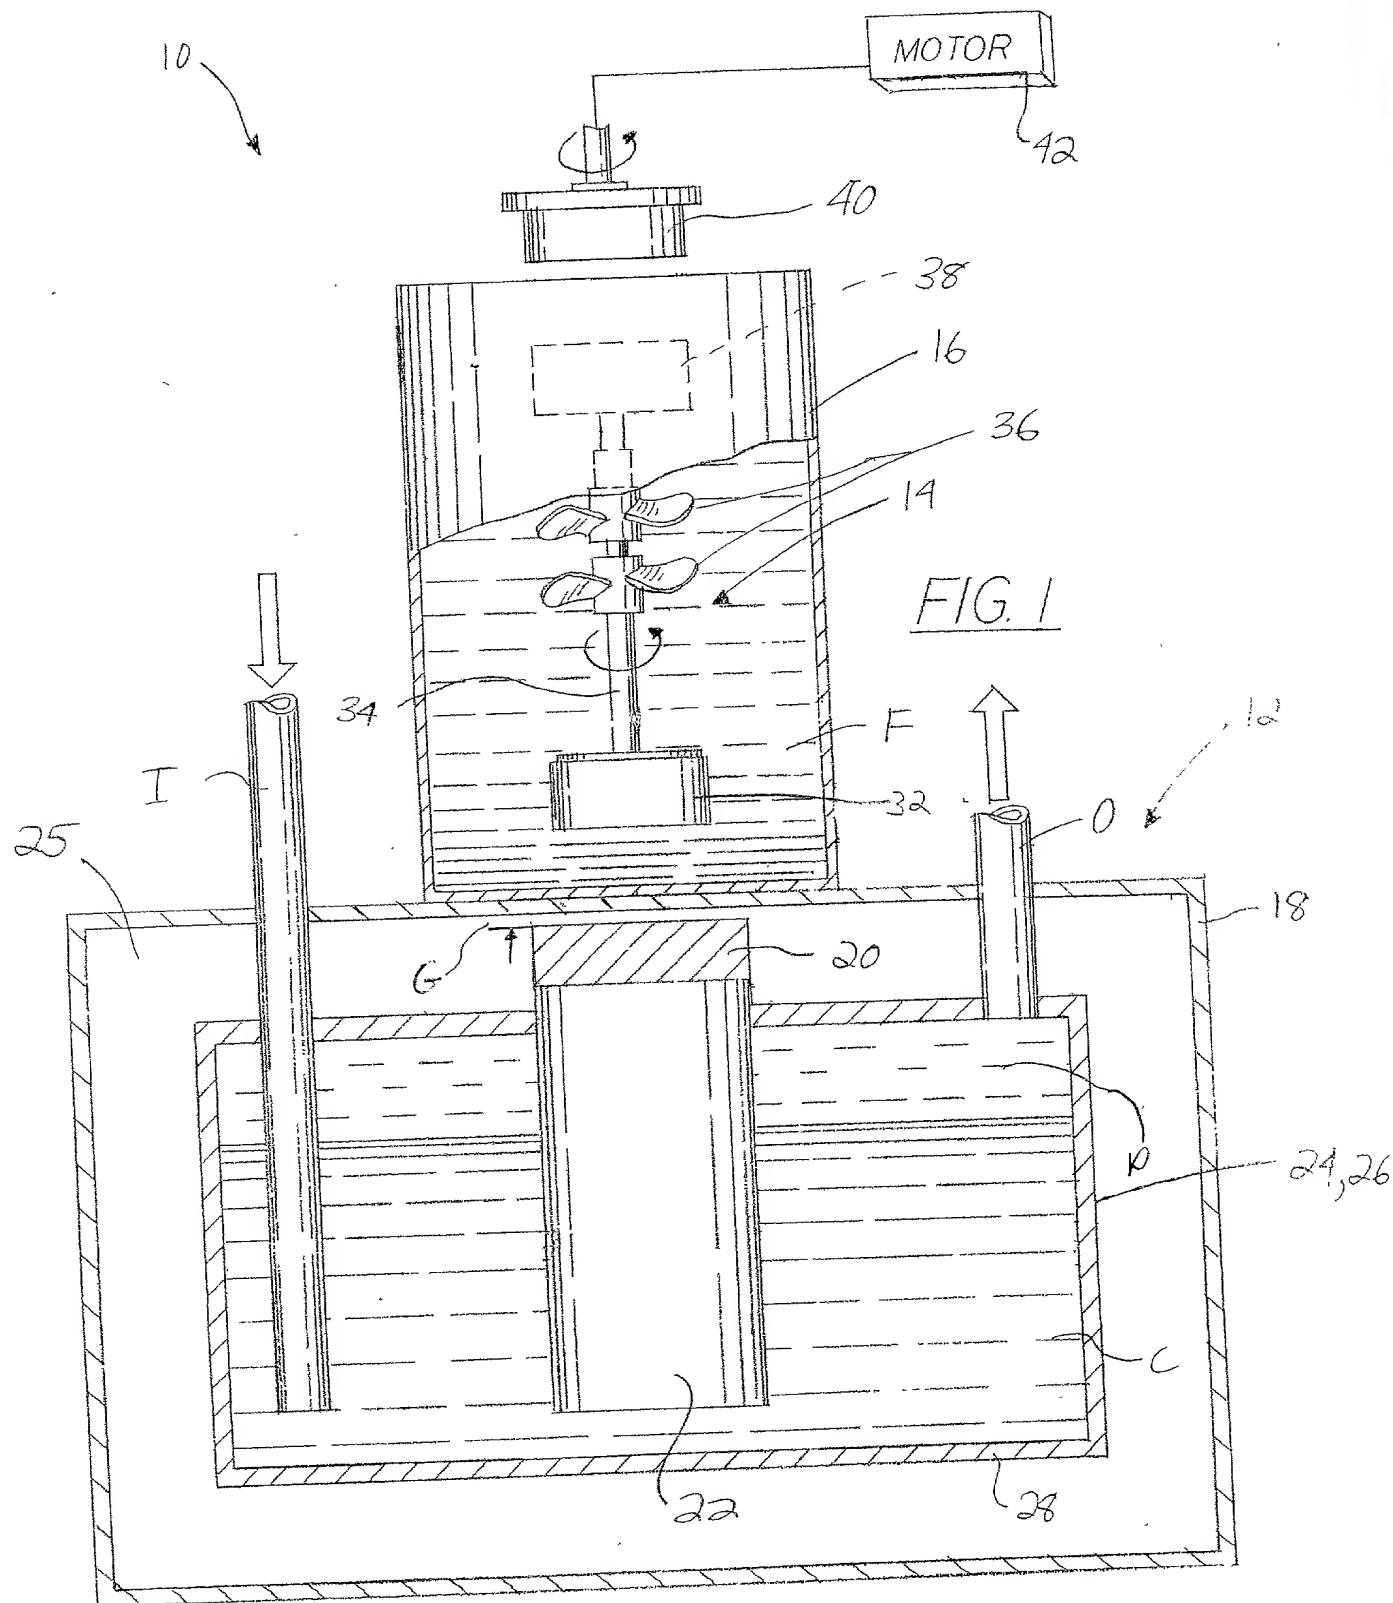






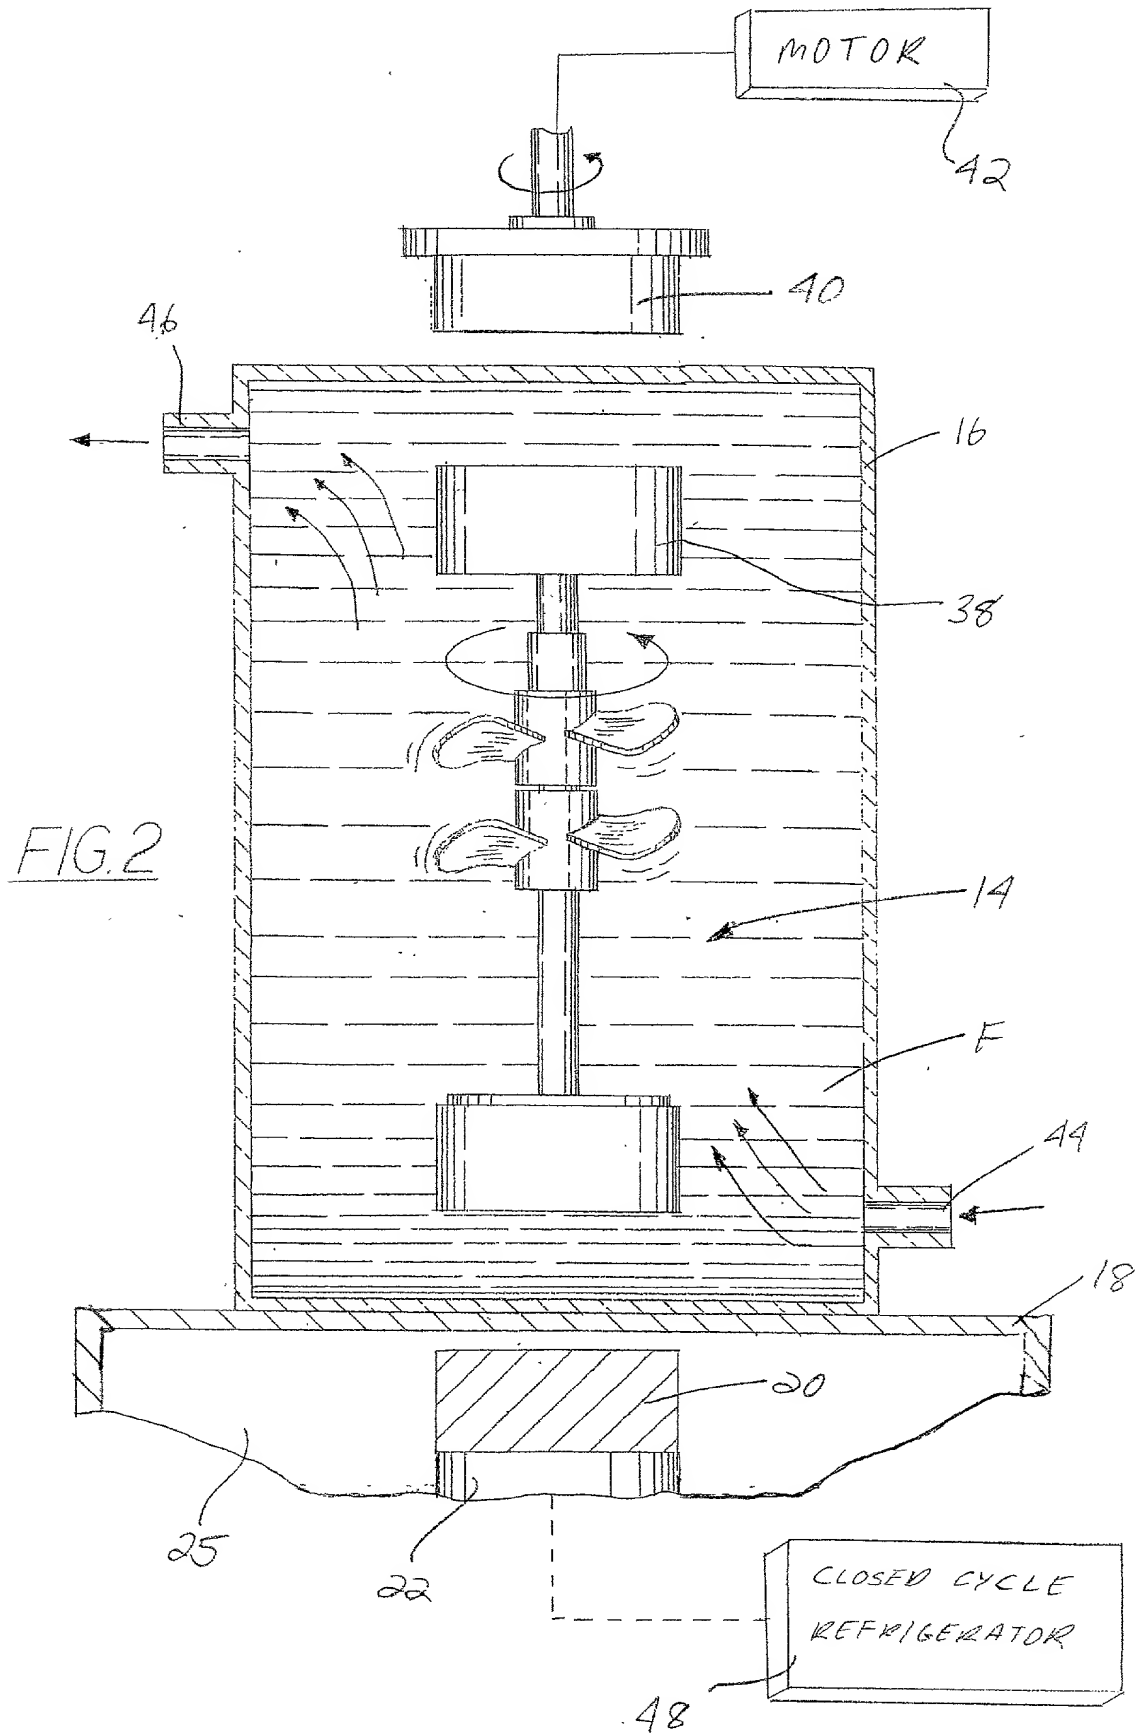




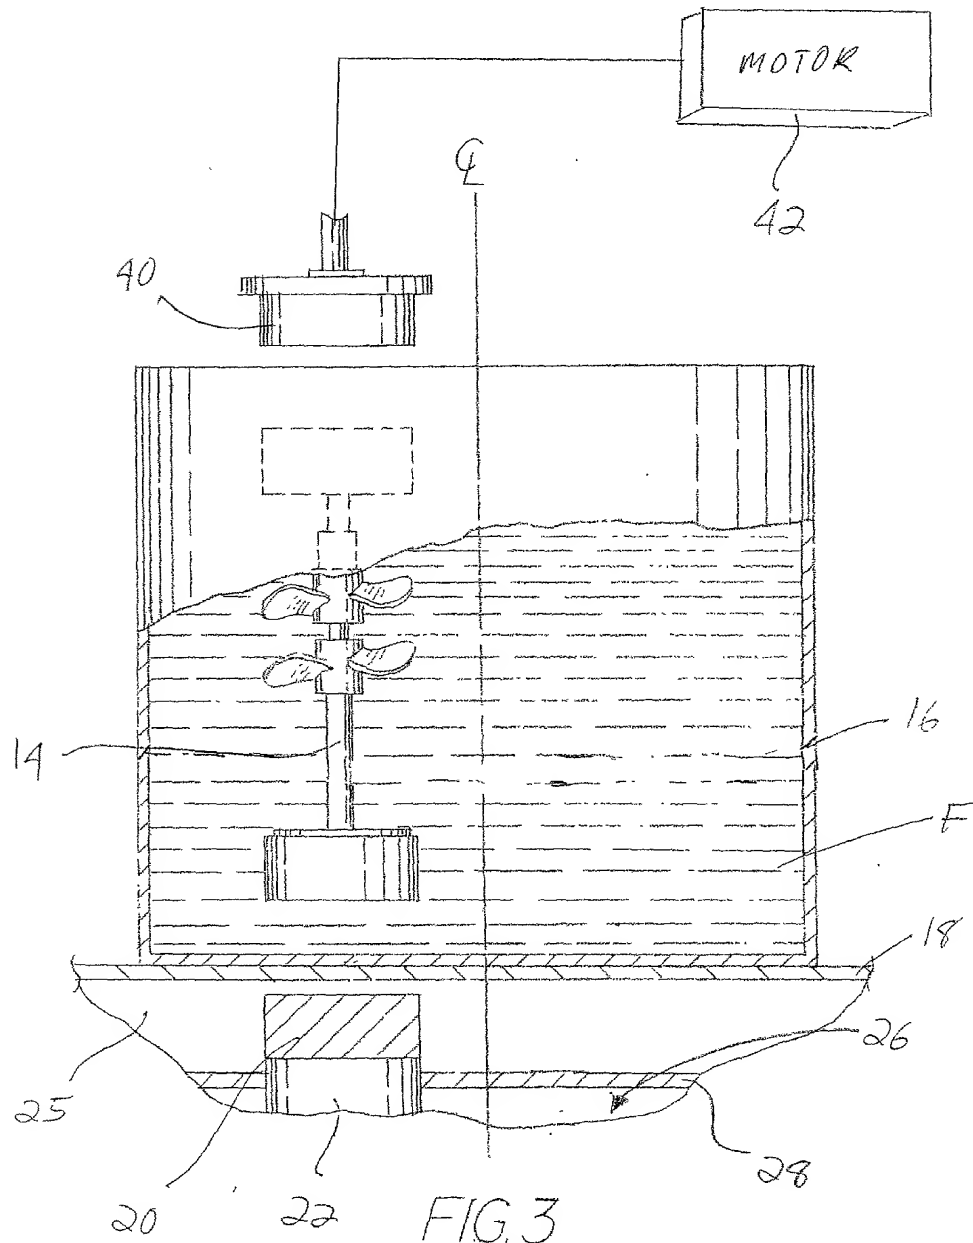


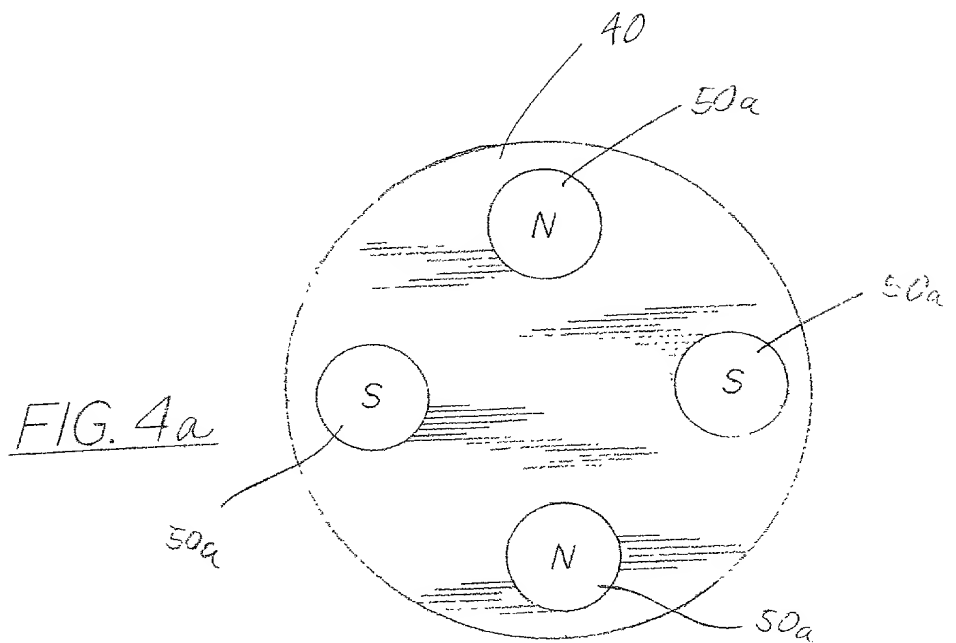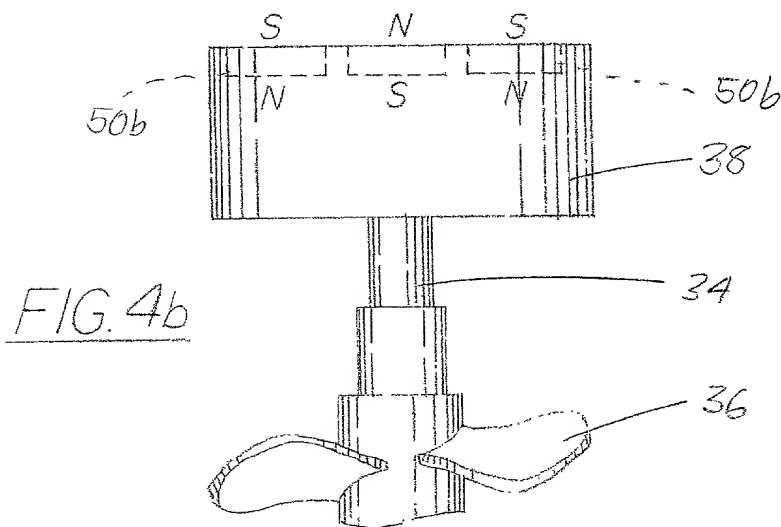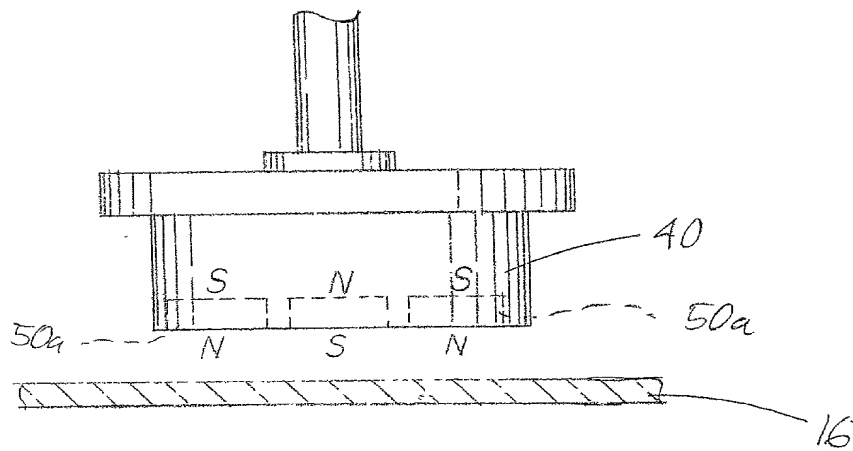


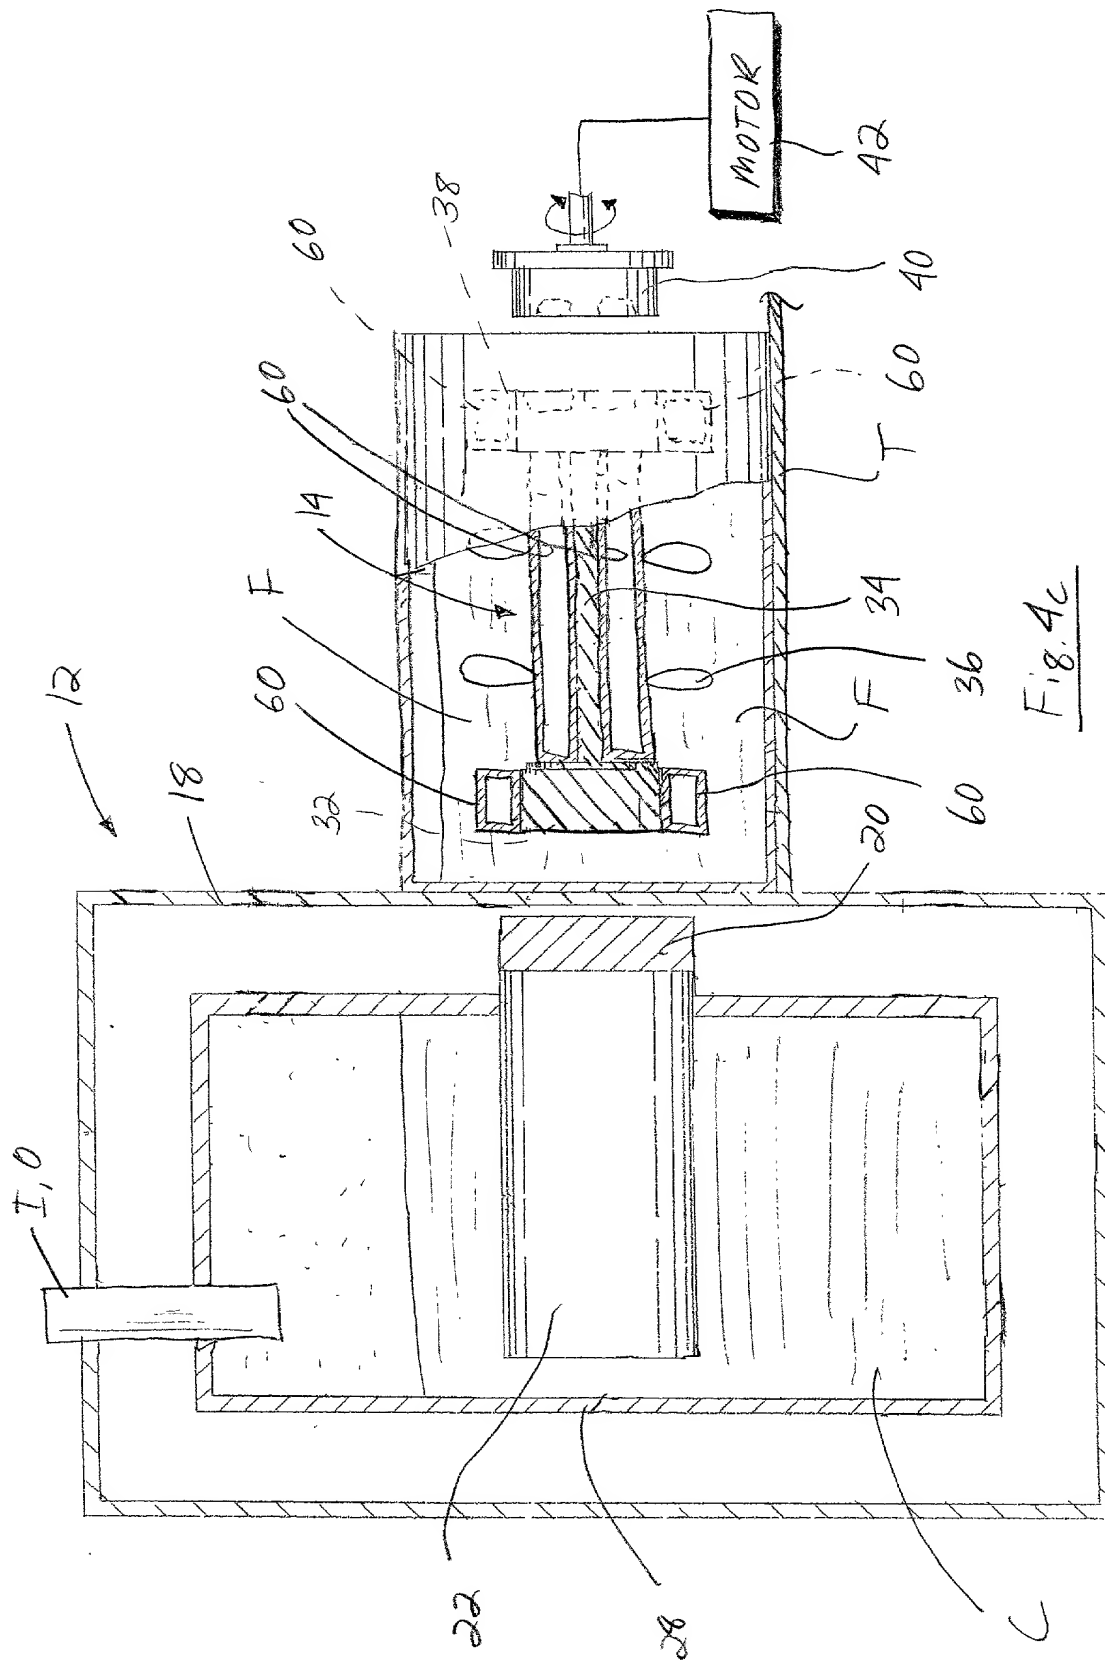


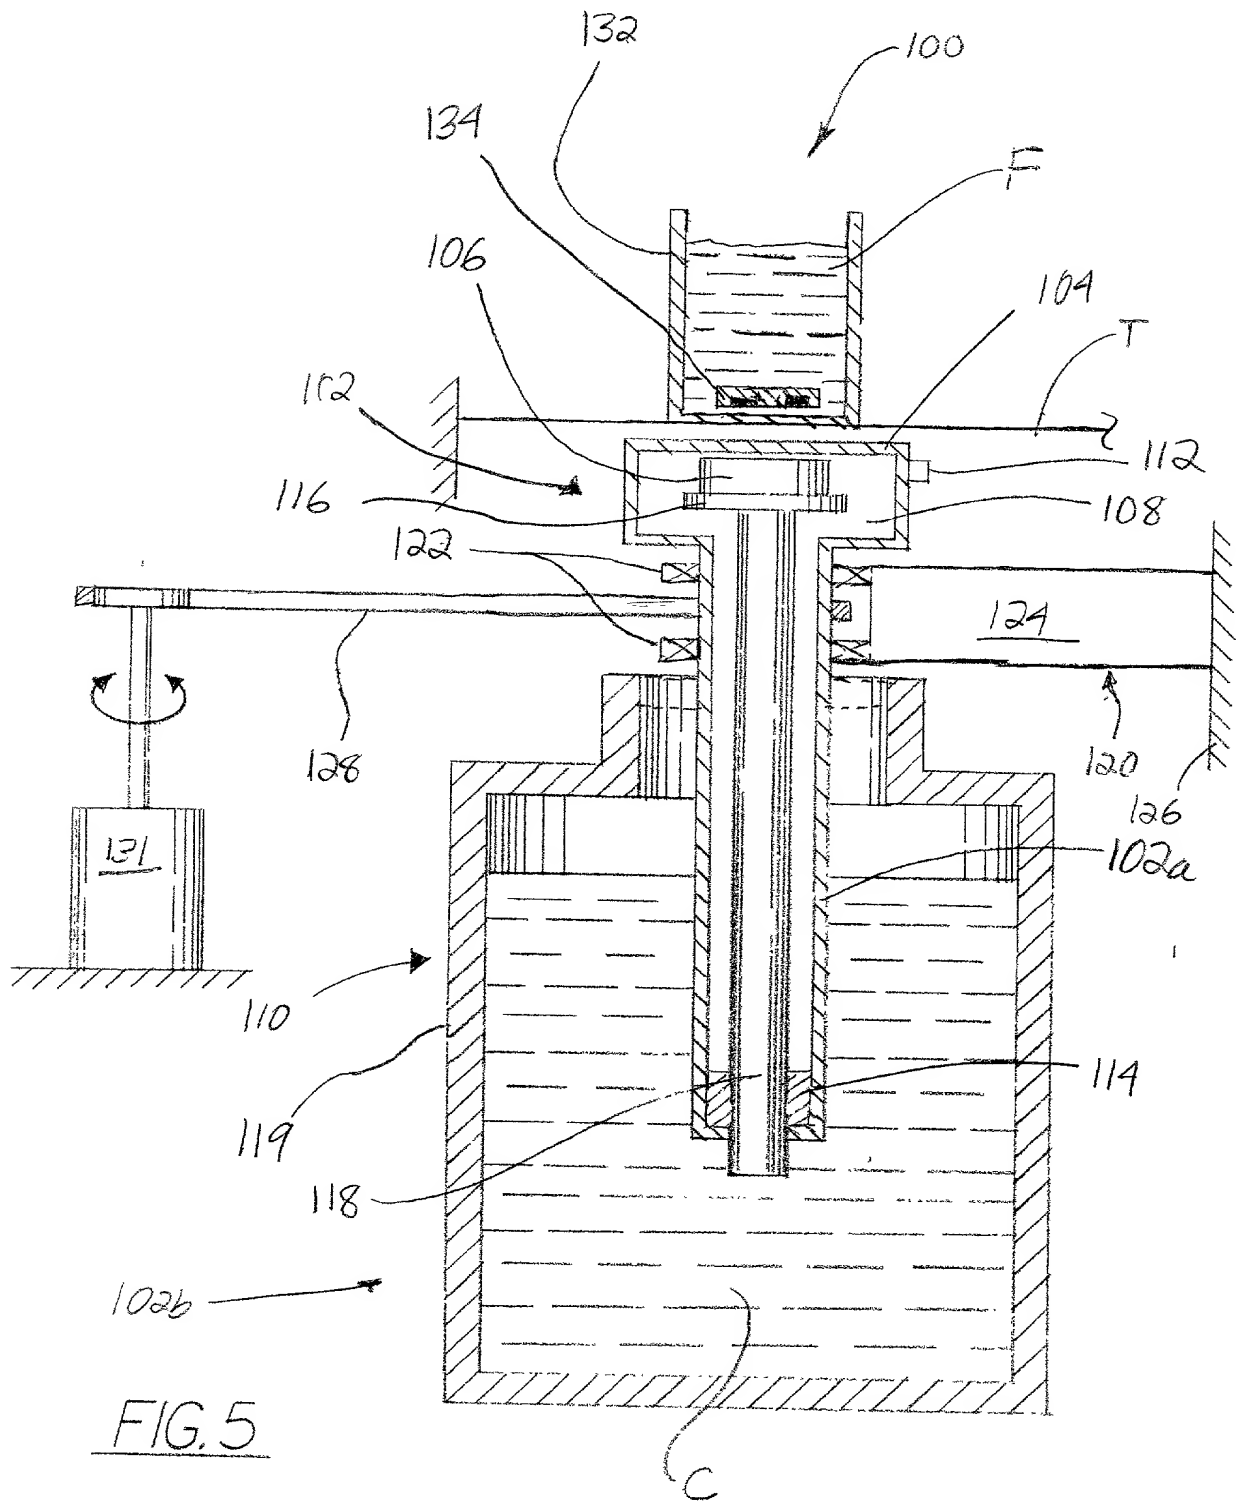


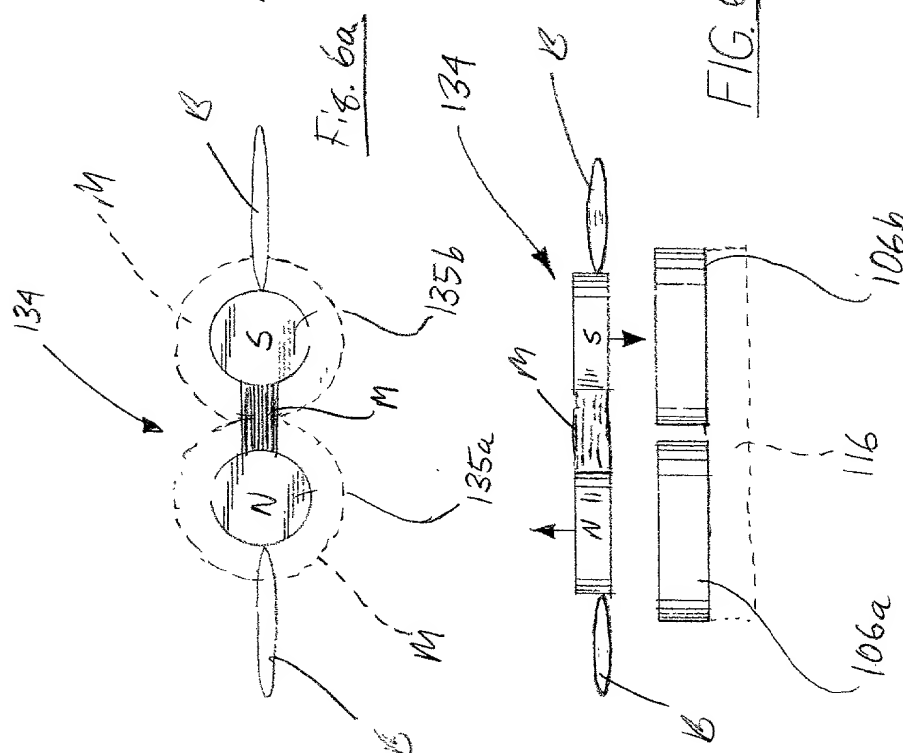
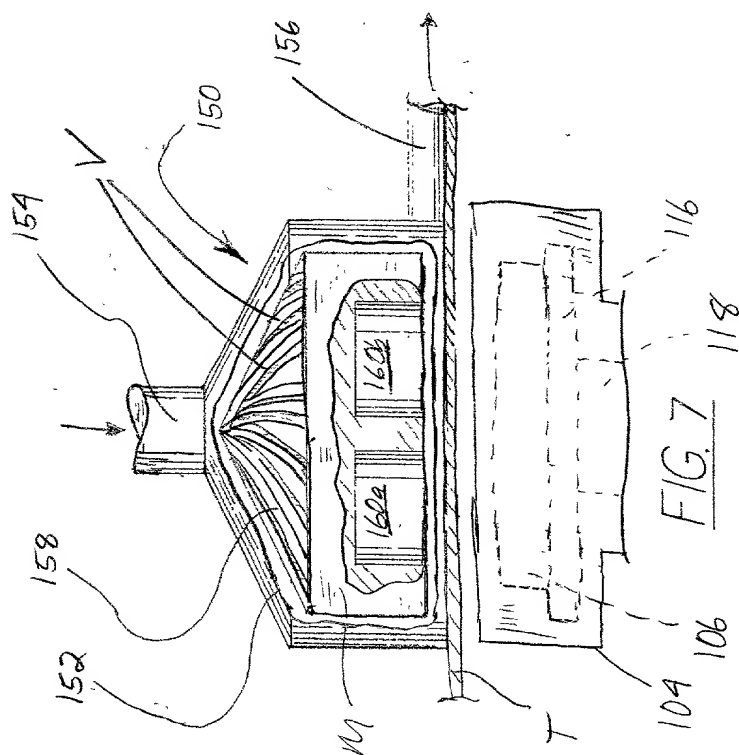


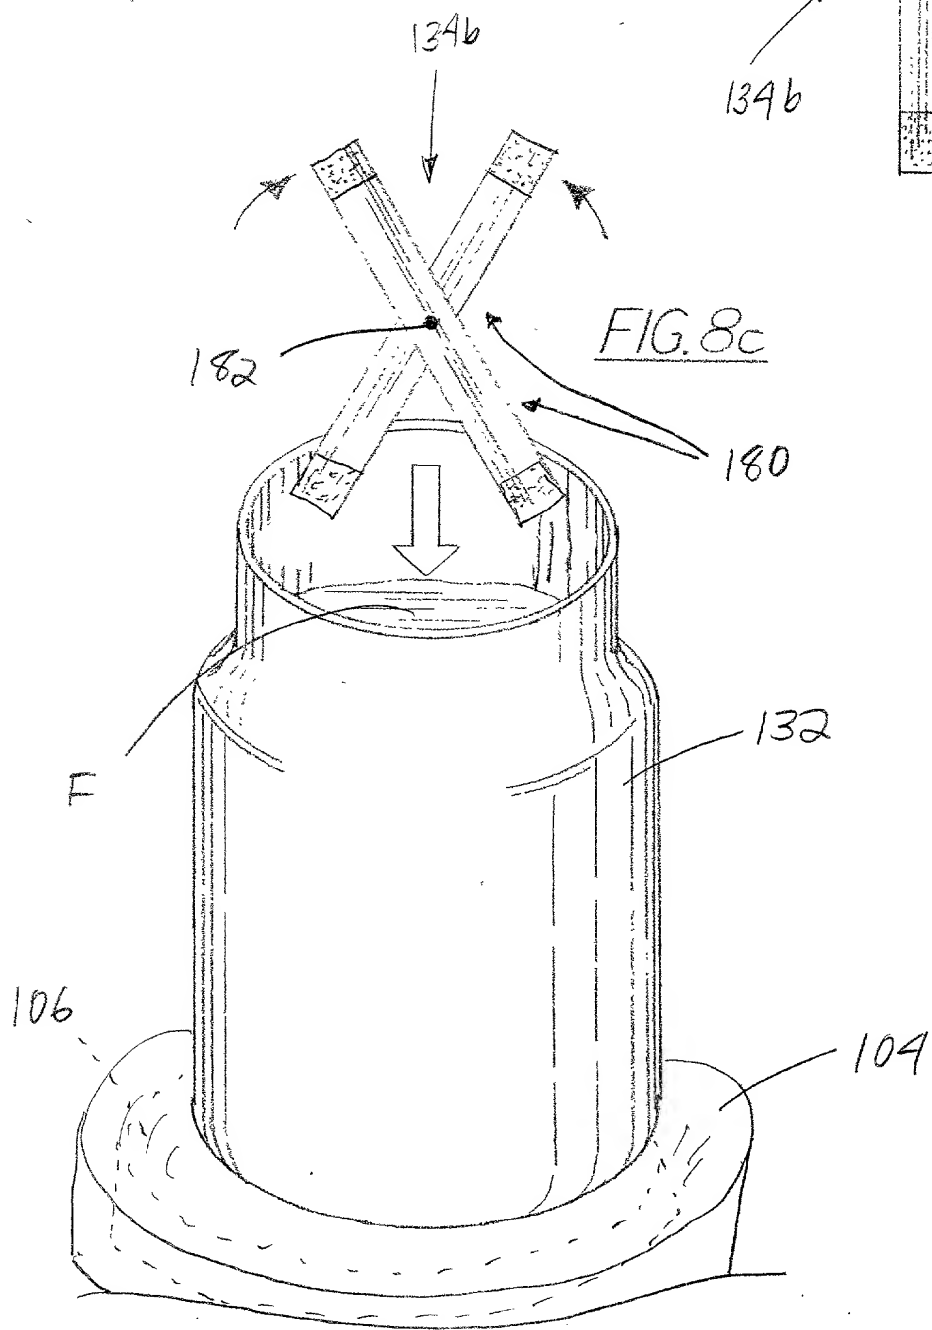
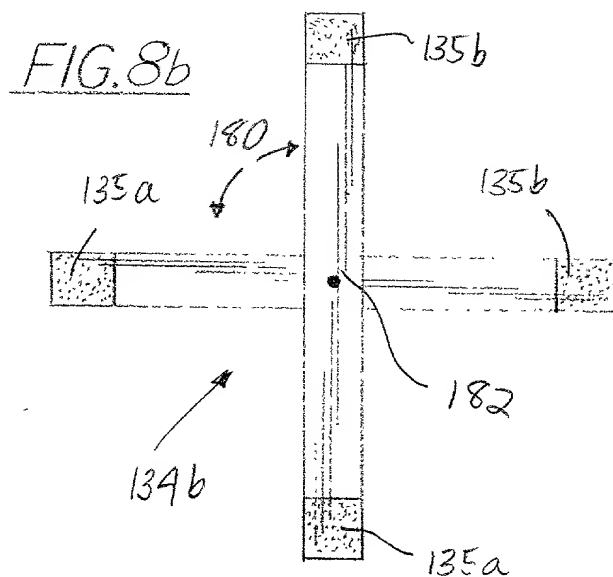
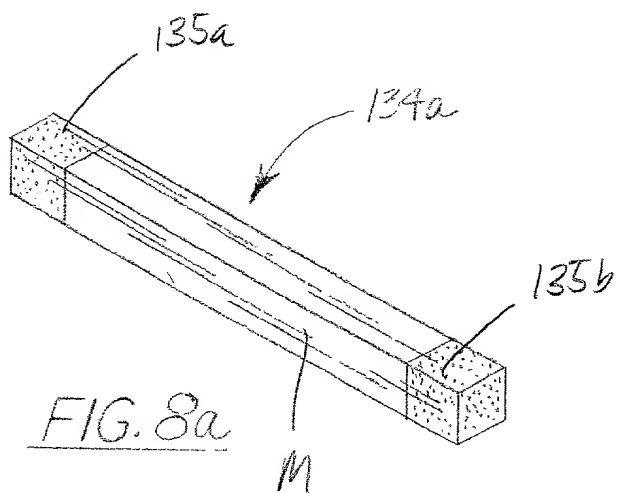


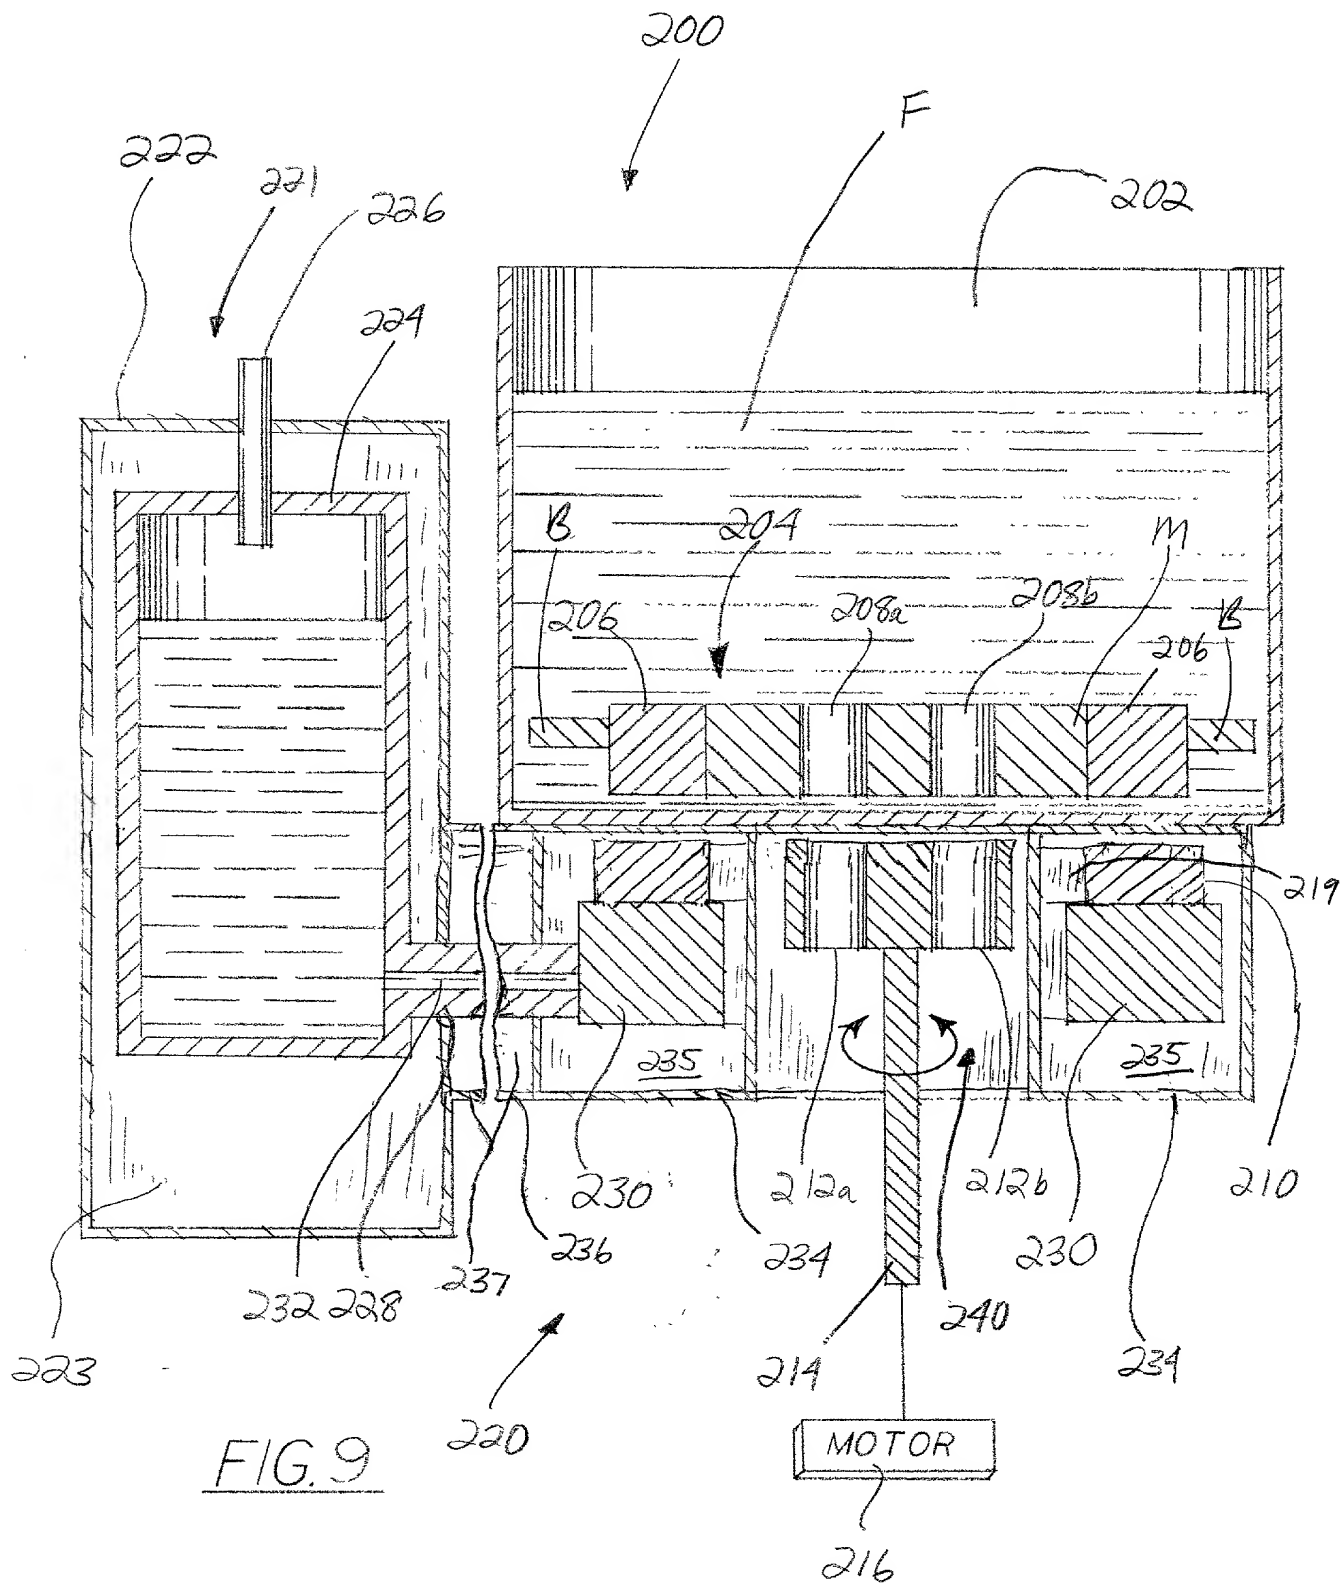




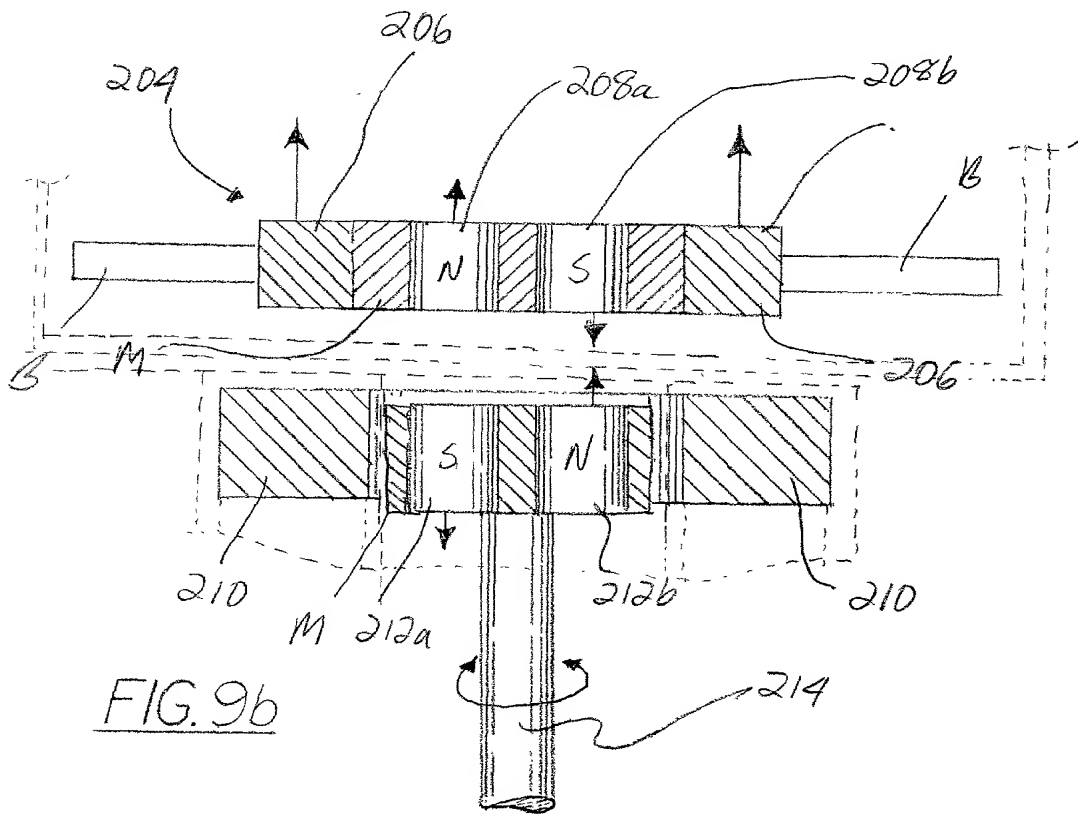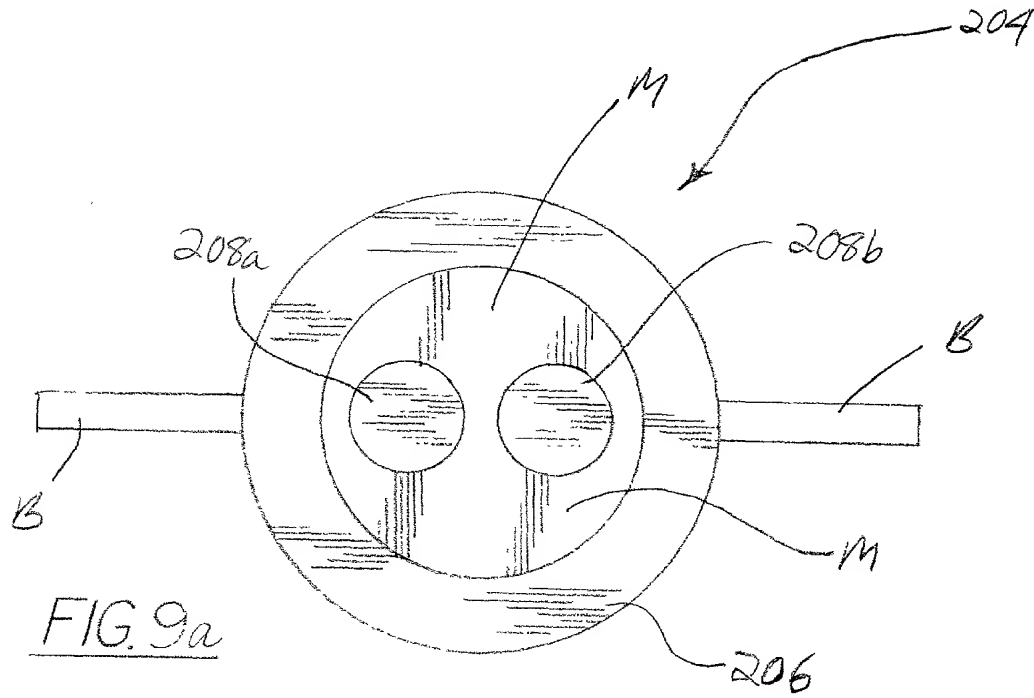

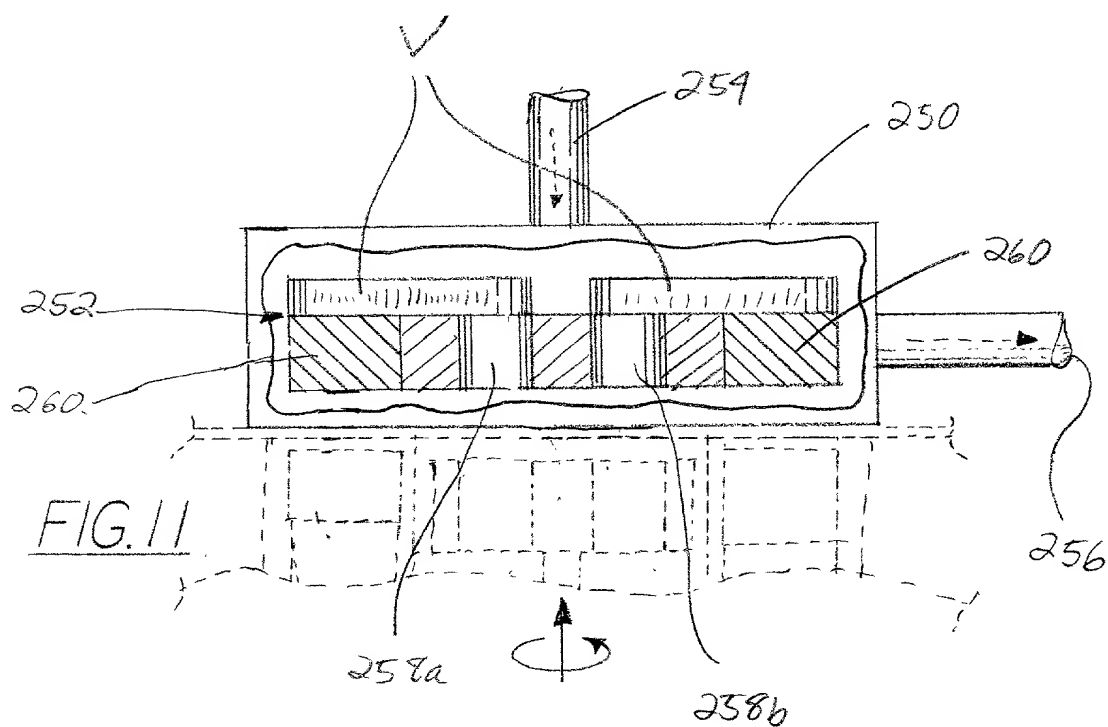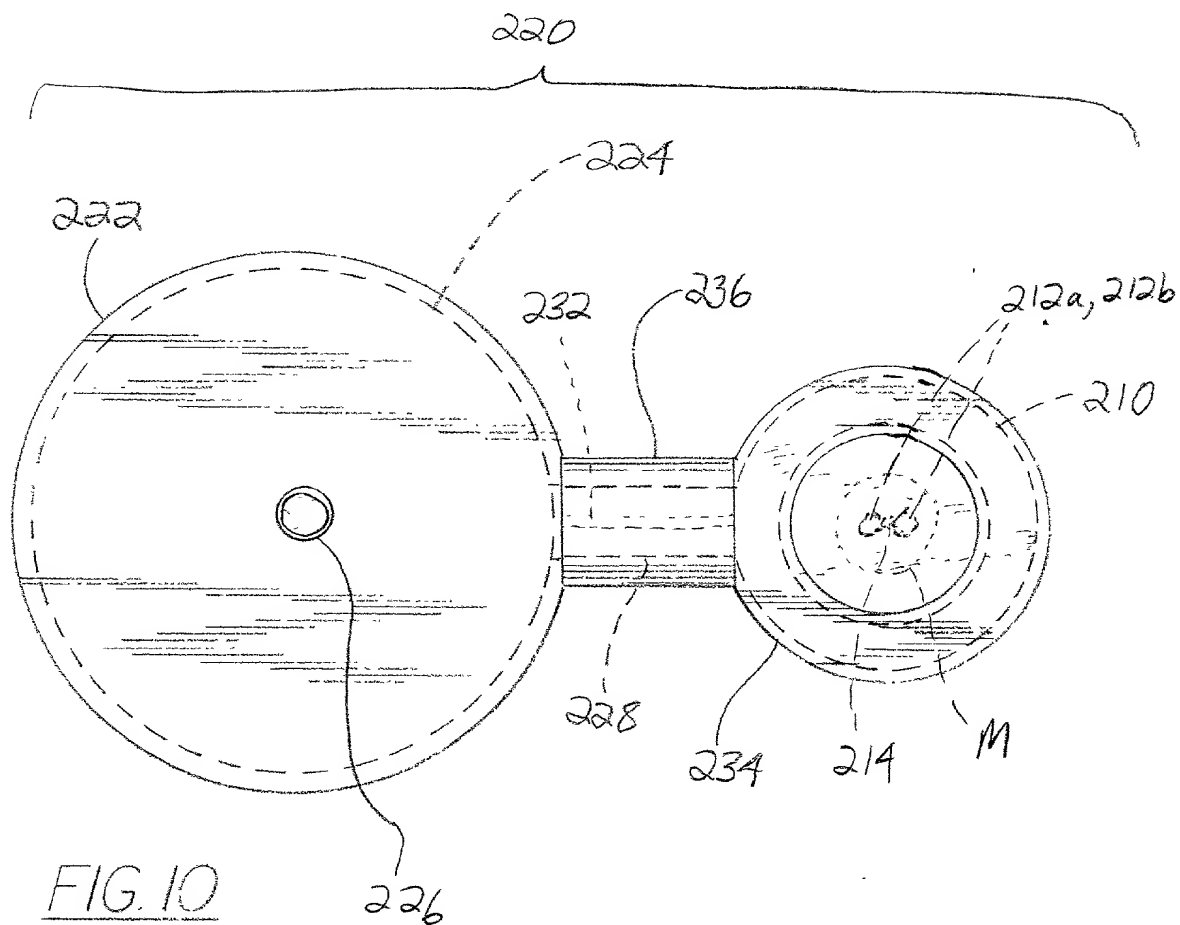

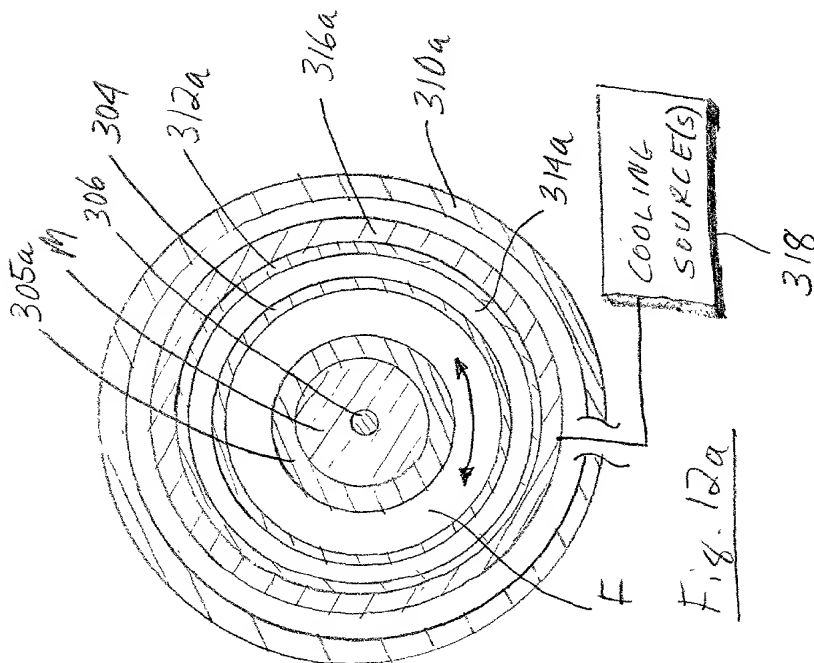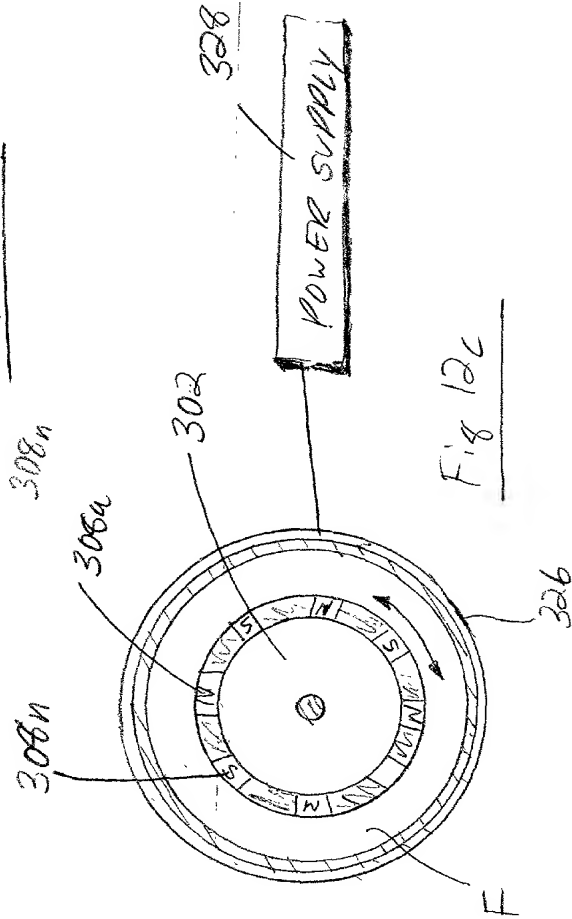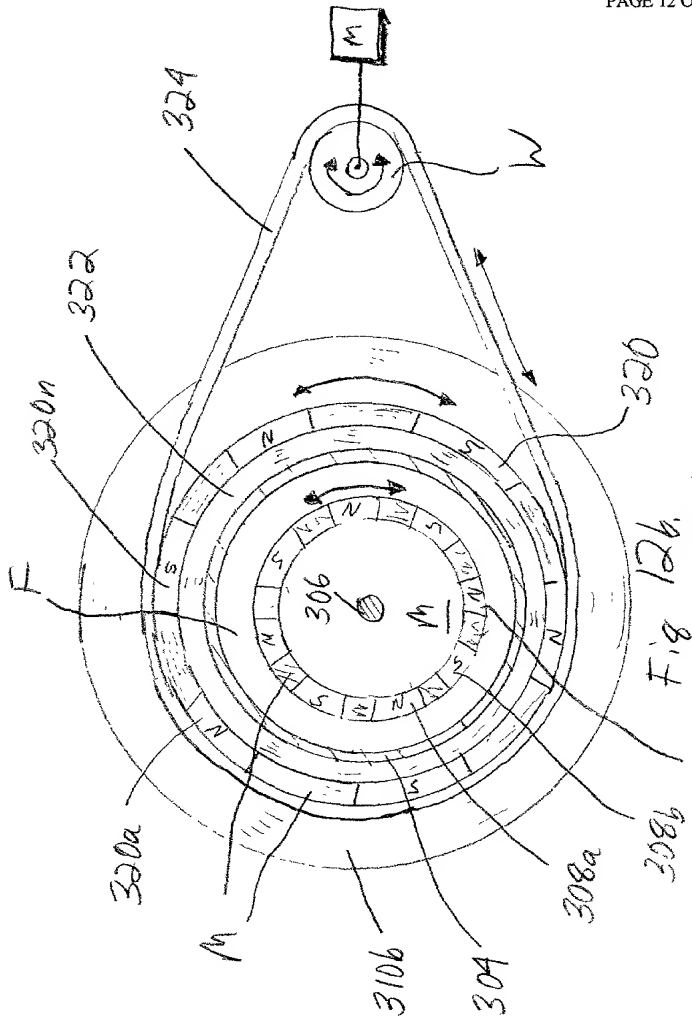





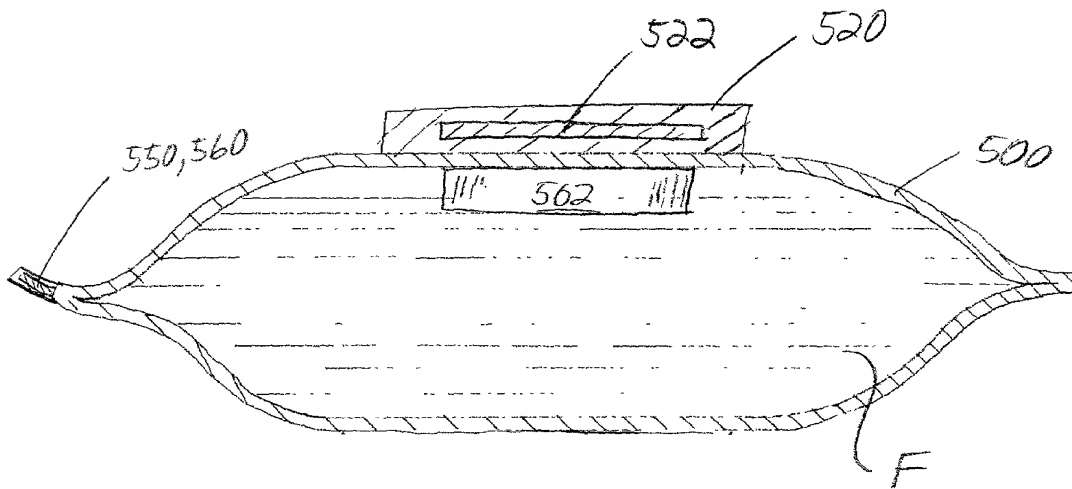


Fig. 14a

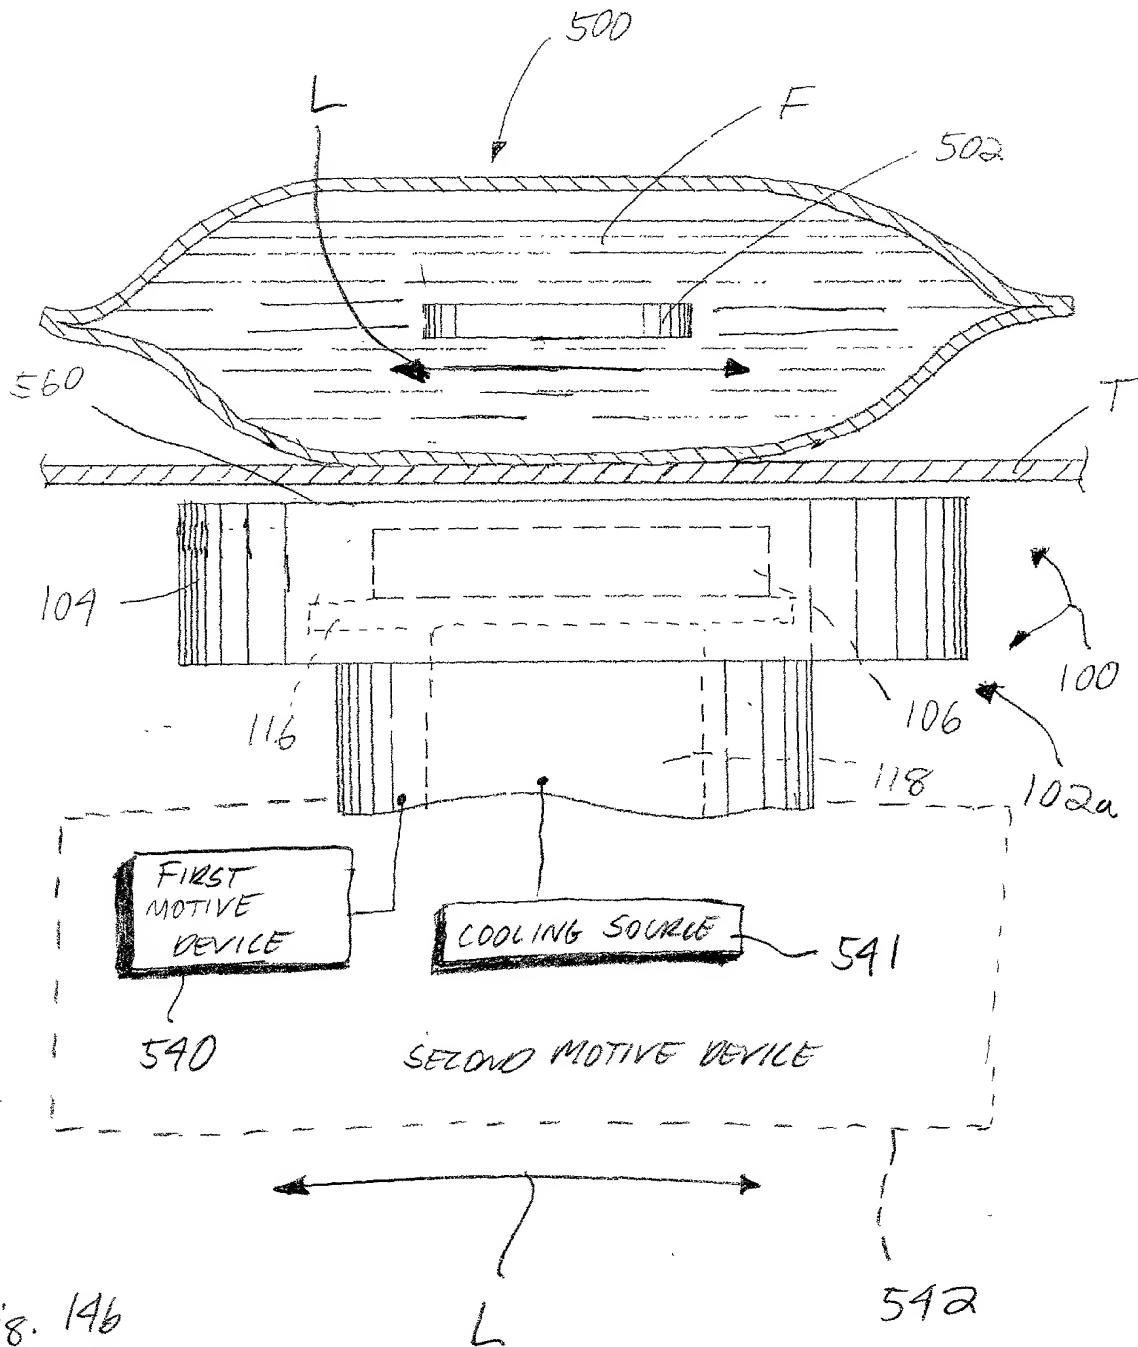


Fig. 146

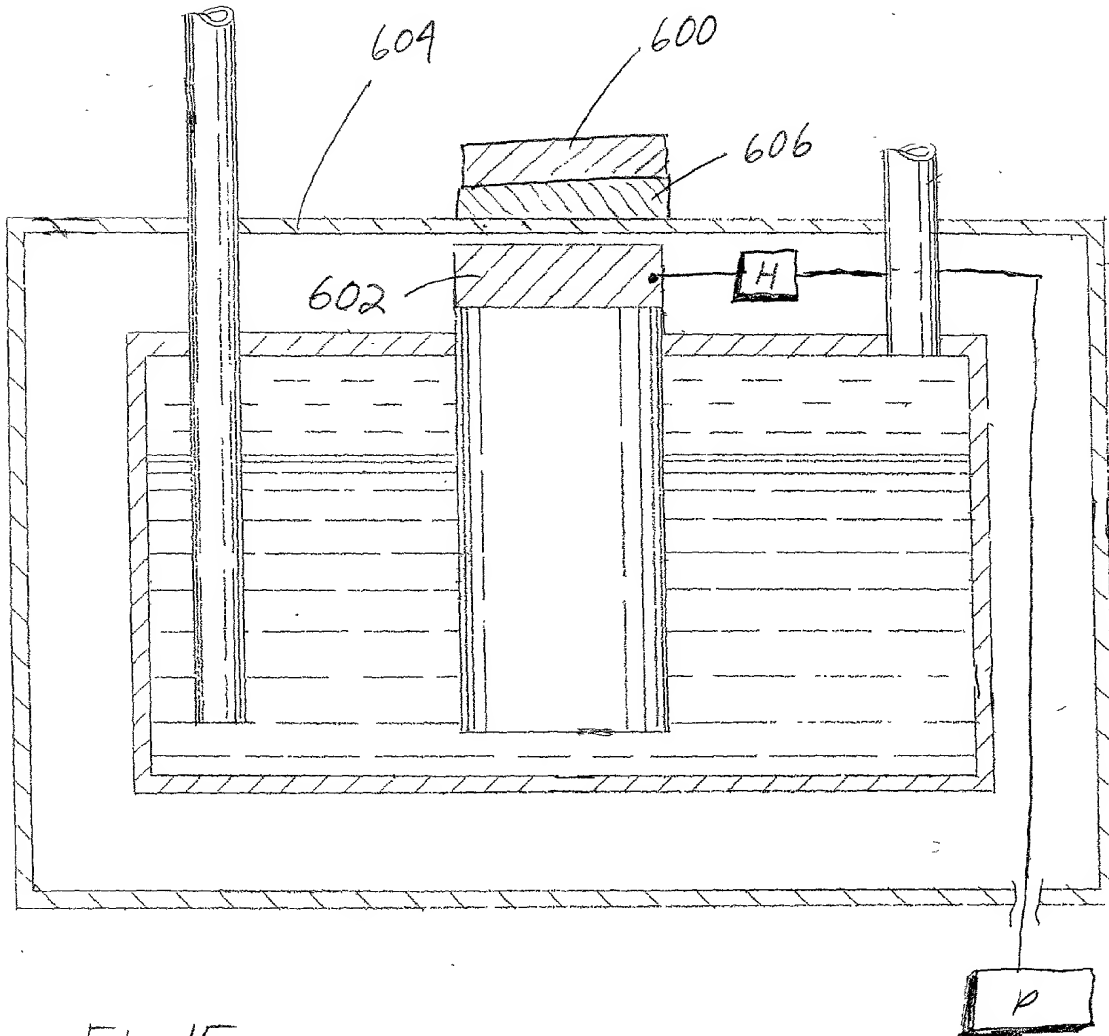


Fig. 15



Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b> <b>(37 CFR 1.63)</b>  <input type="checkbox"/> Declaration Submitted with Initial Filing <b>OR</b> <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	<b>Attorney Docket Number</b>	642-001
	<b>First Named Inventor</b>	Alexandre N. Terentiev
	<b>COMPLETE IF KNOWN</b>	
	<b>Application Number</b>	/
	<b>Filing Date</b>	
	<b>Group Art Unit</b>	
	<b>Examiner Name</b>	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**PUMPING OR MIXING SYSTEM USING A LEVITATING MAGNETIC BEARING RELATED SYSTEM COMPONENTS, AND RELATED METHODS**

the specification of which (Title of the Invention)

☒ is attached hereto  
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
60/239,187	10/09/2000	

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
09/460,900	12/14/1999	

☐ Additional U.S. or PCT International application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number

001009

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label

001009

OR

☐ Correspondence address below

Name					
Address					
Address					
City		State		ZIP	
Country		Telephone	859/ 252-0889	Fax	859/252-0779

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])	Family Name or Surname
Alexandre N.	Terentiev

Inventor's Signature		Date	11/27/00
----------------------	---	------	----------

Residence: City	Lexington	State	KY	Country	US	Citizenship	Russian
-----------------	-----------	-------	----	---------	----	-------------	---------

Post Office Address	282 Commonwealth Drive, Lexington, Kentucky 40503						
---------------------	---	--	--	--	--	--	--

Post Office Address							
---------------------	--	--	--	--	--	--	--

City	Lexington	State	KY	Zip	40503	Country	US
------	-----------	-------	----	-----	-------	---------	----

☐ Additional inventors are being named on the \_\_\_\_ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto